



**BOUNCE**  
LIGHTING

*Professional Lighting Solutions*



# About Us

Bounce is a professional lighting service which offers value engineering for all your lighting needs. We focus on analysing your lighting designs for the purpose of achieving you an alternative solution at a lower cost but keeping the required performance and quality products.

We have a strong team of friendly and helpful staff who have over 20 years of experience in the lighting industry and have been servicing both trade and private customers during this time.



# Contents

▶ Downlights	Pages 03-14
▶ Tracklights	Pages 15-16
▶ Panels_Troffers	Pages 17-22
▶ Pendant	Pages 23-24
▶ Battens	Pages 25-26
▶ Led Strips	Pages 27-29
▶ Neon Flex	Pages 30-51
▶ Linear LED Range	Pages 52-57
▶ Healthcare	Pages 58-61
▶ Handrail Lighting	Pages 62-63
▶ Exterior	Pages 64-66
▶ Weatherproof Battens	Pages 67-68
▶ Highbays_Lowbays	Pages 69-72
▶ Floodlights_Area Light	Pages 73-81
▶ Solar Lighting	Pages 82-83





***Downlights***\_\_\_\_\_


## Anti-glare Mini Fixed D/L

- Deep anti-Glare Reflector
- Die Cast Aluminum Body & narrow Trim
- 18° - 36° optic
- SDCM<3
- Powder Coated Finish
- CRI 80-90
- IP54 rating
- Dali
- Recessed



## Applications

- Entry Lobby's
- External Awnings
- Hotels
- Retail
- Amenities
- Hospitals

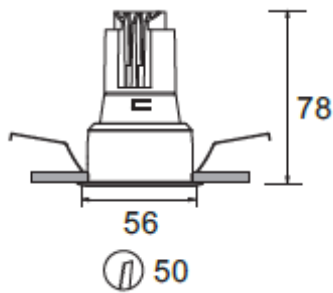

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-CL36L-1D203F/3W/40	3W	180lm	56 x 78 mm	0.7Kg	NO	3000K	50,000H
BL-KAS-CL36L-1D203F/3W/40	5W	240lm	56 x 78 mm	0.7Kg	NO	4000K	50,000H




## Low-Glare Downlight

- Low Glare Reflector
- Aluminum die cast
- White frame+White heat sink
- L70, 50,000hrs
- 28°,38°,50° Beam angle
- SDCM<
- 2700k -5000k
- 800lm - 1000lm
- CRI 80 -90
- IP20 rating
- Dali
- Recessed

## Applications

- Entry Lobby's
- Hotels
- High Ceilings
- Retail
- Industrial Buildings
- Amenities
- Hospitals

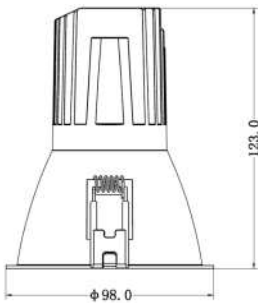

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-CL37R-1D-3510F/10W/30	10W	800lm	98 x 123 mm	0.7Kg	NO	3000K	50,000H
BL-KAS-CL37R-1D-3510F/10W/40	10W	800lm	98 x 123 mm	0.7Kg	NO	4000K	50,000H





## High Output IP65 D/L

- Faceted Low Glare Reflector
- 60° Beam with 30° Cut Off
- Tempered glass
- Die Cast Aluminum Body & Trim
- SDCM<3
- Powder Coated Finish
- High efficiency LED 95-110Lm/W
- CRI 80 -90
- IP65 rating
- Dali
- Recessed
- Surface Mount CAN Options



## Applications

- Entry Lobby's
- External Awnings
- Retail
- Industrial Buildings
- Security
- Hospitals

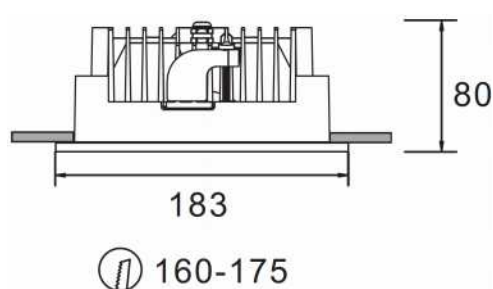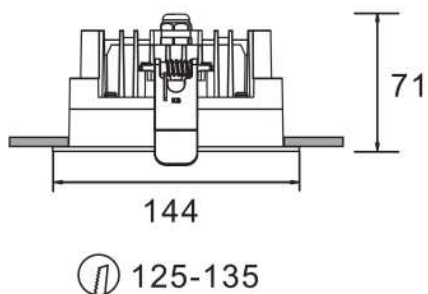

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-DL03-R4/15W/40	15W	1495lm	144 x 71 mm	0.7Kg	NO	4000K	50,000H
BL-KAS-DL03-R4/20W/40	20W	2003lm	144 x 71 mm	1.3Kg	NO	4000K	50,000H
BL-KAS-DL03-R6/20W/40	20W	1895lm	183 x 80 mm	1.3Kg	NO	4000K	50,000H
BL-KAS-DL03-R6/30W/40	30W	2755lm	183 x 80 mm	1.3kg	NO	4000K	50,000H
BL-KAS-DL03-R6/30W/40	40	3897lm	183 x 80 mm	1.3kg	NO	4000K	50,000H







## High Output IP65 D/L

- High Specular Aluminum Reflector
- 30°, 45°, 75° & 80° Beam Options
- Die Cast Aluminum Body & Trim
- SDCM<3
- CRI 80-90
- Powder Coated Finish
- High Efficiency COB LED
- CRI 80-90
- IP65 rating
- Dali
- Recessed
- Surface Mount CAN Options



## Applications

- Entry Lobby's
- Lift Lobby's
- Large Conference Rooms
- High Ceilings
- Retail
- Corridors
- Schools
- Hospitals

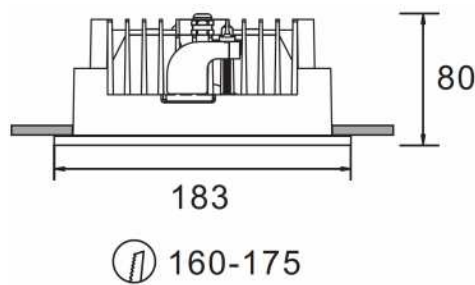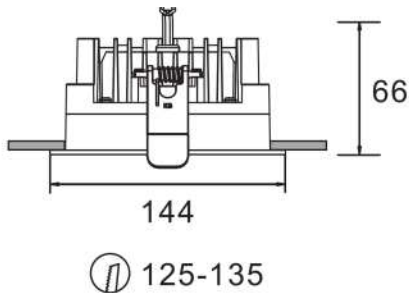

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-DL03-L24/15W/40	15W	1425lm	144 x 66 mm	0.7Kg	NO	4000K	50,000H
BL-KAS-DL03-L26/20W/40	20W	1900lm	144 x 66 mm	1.3Kg	NO	4000K	50,000H
BL-KAS-DL03-L26/20W/40	20W	1900lm	183 x 80 mm	1.3Kg	NO	4000K	50,000H
BL-KAS-DL03-L26/30W/40	30W	2850lm	183 x 80 mm	1.3kg	NO	4000K	50,000H
BL-KAS-DL03-L26/30W/40	40W	3800lm	183 x 80 mm	1.3kg	NO	4000K	50,000H









## Classic Commercial D/L

- Deep Diffuser or Faceted
- Slim design
- Die Cast Aluminum Body
- Wide Beam 60°- 90°
- Powder Coated White Finish
- CRI 80
- 2700k, 3000k, 4000k, 5000k
- Dimming options
- IP20 - IP44 Indoor
- Cutout 90-100mm
- Dali
- Recessed



## Applications

- Residential
- LED upgrades
- Buildings
- Amenities
- Office
- Corridors
- General Area Lighting

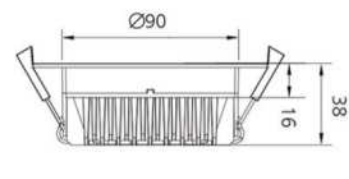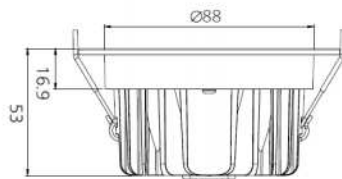

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-UP-DL22-3-13W/40	13W	880lm	110 x 53 mm	0.35kg	NO	4000K	50,000H
BL-UP-CL59-3-13W/40	13W	950lm	110 x 38 mm	0.28kg	NO	4000K	50,000H




## Anti-glare Low Profile D/L

- Low Profile
- Wide Beam 90°
- Die Cast Aluminum Body & Trim
- SDCM<3
- Powder Coated Finish
- 12w-30w options
- High Efficiency SMD LED
- 100lm/W
- CRI 80
- IP20 Rating
- Dali
- Recessed



## Applications

- Retro fitting upgrades
- Lift Lobby's
- Store rooms
- Retail
- Corridors
- Schools
- Hospitals

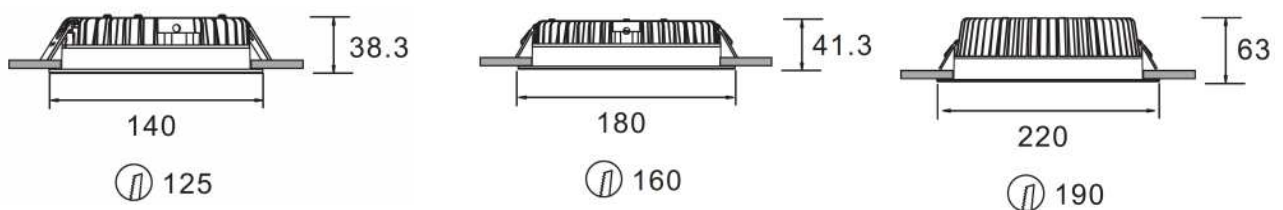

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-DL15-B4/12W/40	12W	935lm	140 x 38.3 mm	0.4kg	NO	4000K	50,000H
BL-KAS-DL15-B4/15W/40	15W	1275lm	140 x 38.3 mm	0.4kg	NO	4000K	50,000H
BL-KAS-DL15-B6/20W/40	15W	1275lm	180 x 41.3 mm	0.9kg	NO	4000K	50,000H
BL-KAS-DL15-B6/23W/40	20W	1700m	180 x 41.3 mm	0.9kg	NO	4000K	50,000H
BL-KAS-DL15-B6/30W/40	23W	1955lm	220 x 63 mm	1.3kg	NO	4000K	50,000H
BL-KAS-DL15-B6/30W/40	30W	2550lm	220 x 63 mm	1.3kg	NO	4000K	50,000H










*Shore\_DownLights*

## Low Profile D/L

- Low Profile
- Beam Angle 15°,30°,45°
- Aluminum Recessed Profile, Low glare optics, silver trim & Louvre
- SDCM<3
- 2700K - 5000K
- 80lm/W
- CRI 80-90
- IP20 Rating
- Dali
- Recessed

## Applications


- Retro fitting upgrades
- Lift Lobby's
- Store rooms
- Retail
- Corridors
- Schools
- Hospitals

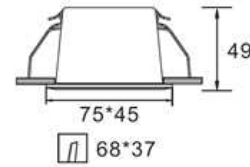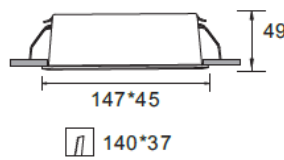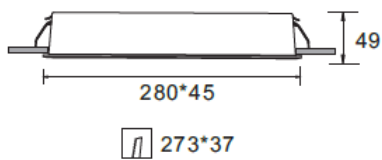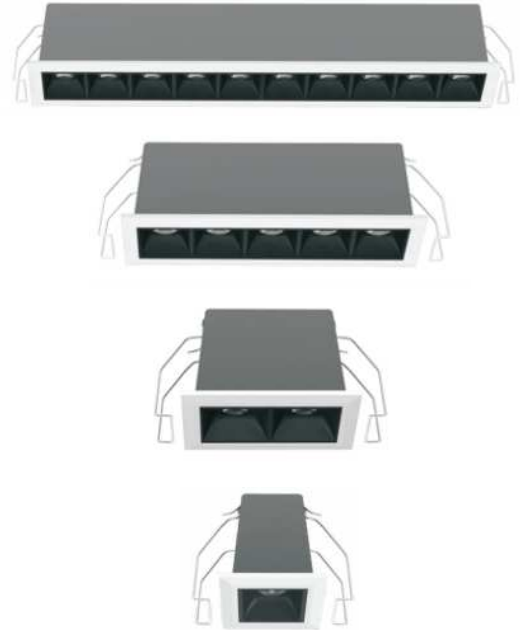

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KS-BL01R-1D-2W/40	2W	160lm	45 x 45 x 49 mm	1.0kg	NO	4000K	50,000H
BL-KS-BL01R-2D/4W/40	4W	320lm	75 x 45 x 49 mm	2.0kg	NO	4000K	50,000H
BL-KS-BL01R-5D-/10W/40	10W	800lm	147 x 45 x 49 mm	3.0kg	NO	4000K	50,000H
BL-KS-BL01R-10D/20W/40	20W	1600lm	280 x 45 x 49 mm	4.0kg	NO	4000K	50,000H





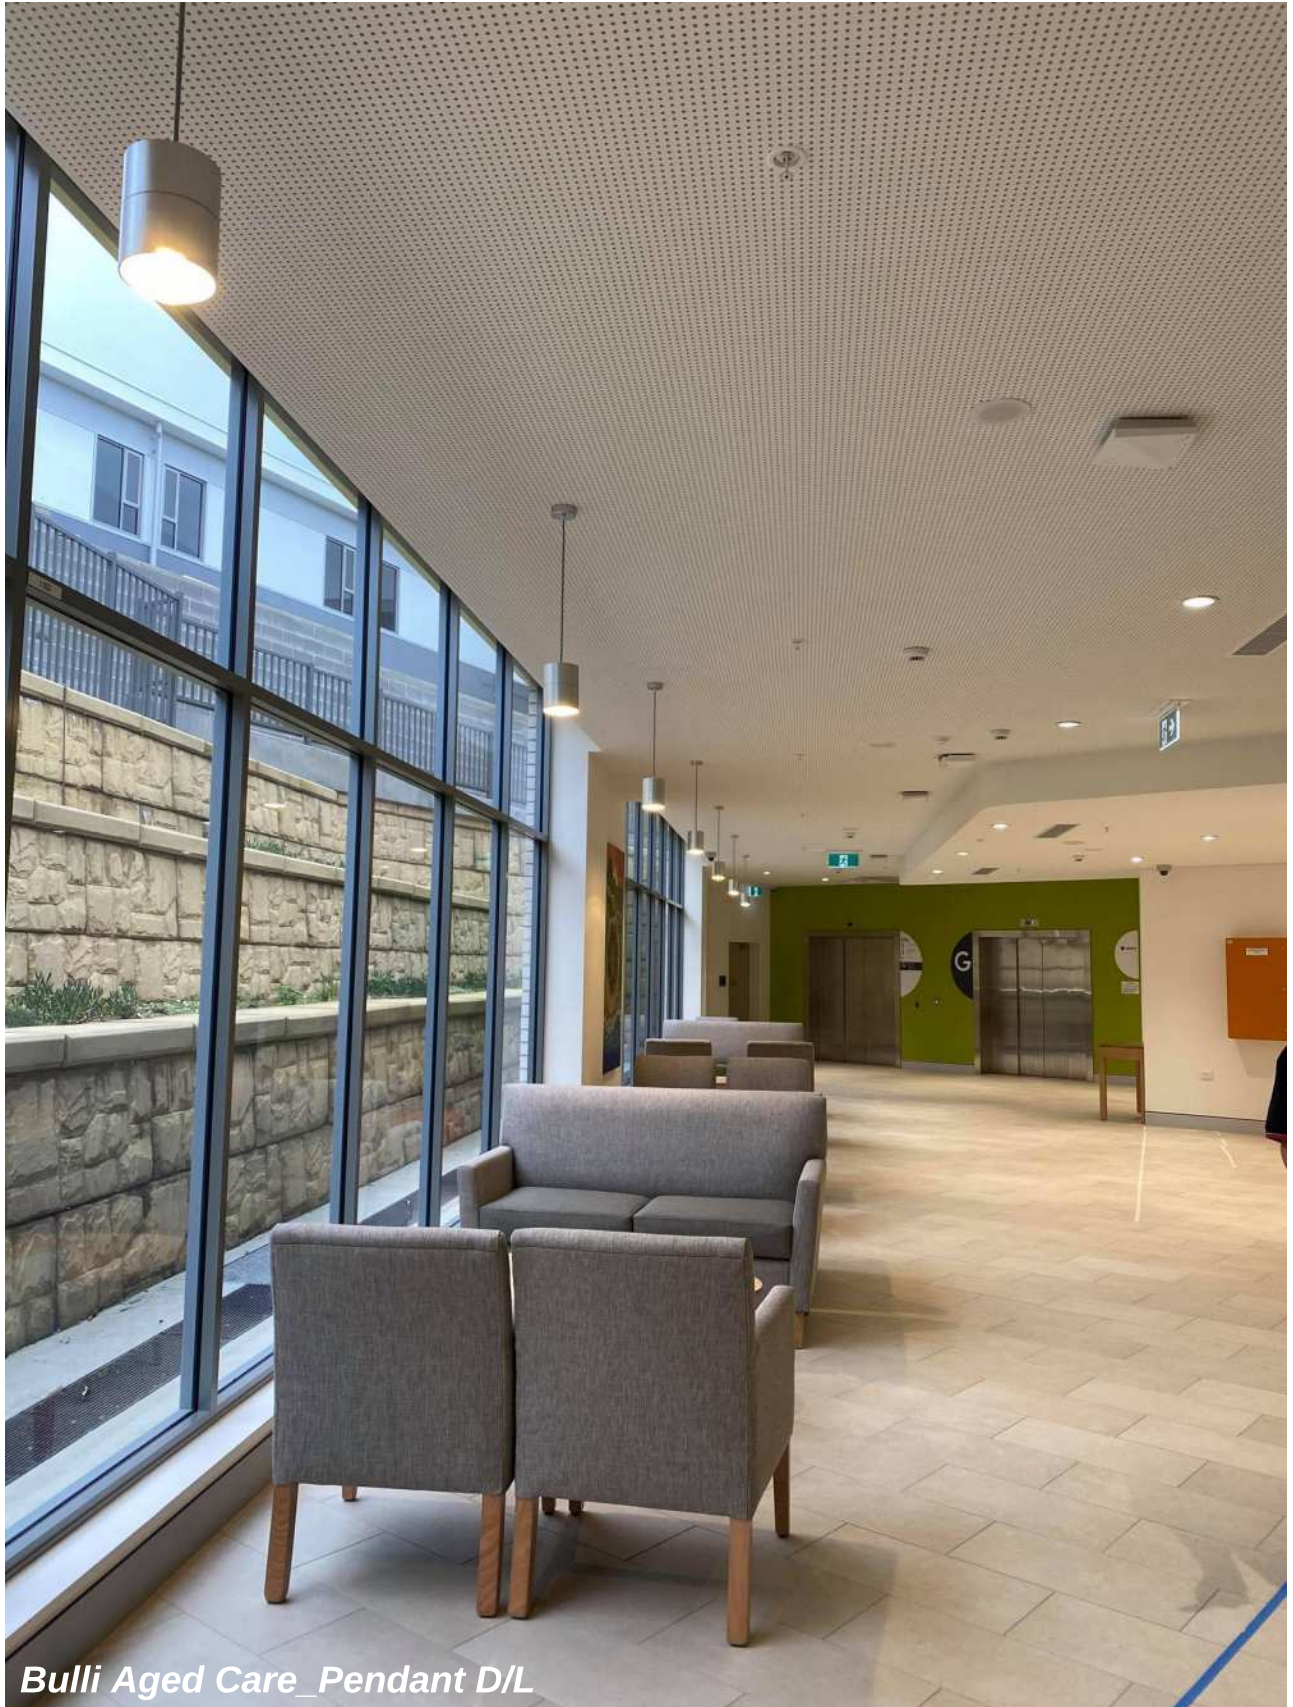


*Bulli Aged Care\_Pendant D/L*

## Surface Mount D/L

- Surface mount Downlight
- Wide Beam 60°
- Tempered glass
- Die Cast Aluminum Body & Trim
- Powder Coated White or Black Finish
- CRI 80-90
- 15W, 20W options
- 1200lm, 1600lm
- IP20 rating
- Dali
- Surface Mount or Pendant option

## Applications

- Entry Lobby's
- External Awnings
- High Ceilings
- Retail
- Industrial Buildings
- Security
- Amenities
- Hospitals

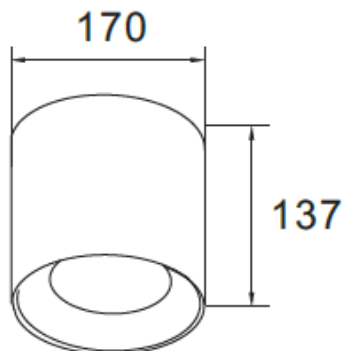

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-MD02-RA6/15W/40	15W	1200lm	170 x 137 mm	1.0kg	NO	4000K	50,000H
BL-KAS-MD02-RA6/20W/40	20W	1600lm	170 x 137 mm	1.0kg	NO	4000K	50,000H







**BOUNCE**  
LIGHTING



***Tracklights***\_\_\_\_\_




## TL Anti-glare spotlight

- 350° Rotatable & 90° adjustable
- 15°- 36° optics
- CRI 80-90
- SDCM<3
- 7W - 30W options
- 560lm - 2700lm
- IP20 rating
- White or Black Finish
- Dali
- Track Mount



## Applications

- Entry Lobby's
- High Ceilings
- Retail
- Amenities
- Library
- School

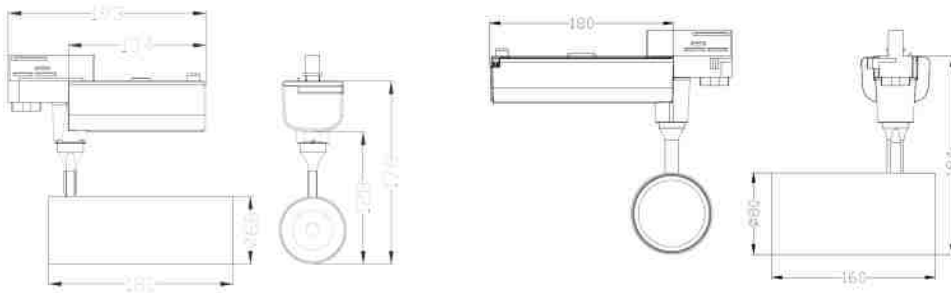

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-TL16L-A6610/4K	10W	900lm	180 x 178 x 66 mm	0.78kg	NO	4000K	50,000H
BL-KAS-TL16L-A8030/4K	30W	2700lm	180 x 194 x 80 mm	0.78kg	NO	4000K	50,000H






***Panels\_Troffers***\_\_\_\_\_


## UGR19 Panels

- UGR19
- PMMA LGP Lens & Aluminum Frame
- Warranty 5yrs
- Beam 60°
- Powder Coated White Finish
- IP44 Standard or IP65 option
- Cyanosis Options
- 2800K or 6500K option
- CRI 80
- High Efficiency LED 100Lm/W
- Dali
- Recessed, Clean room option
- Surface or Suspended options

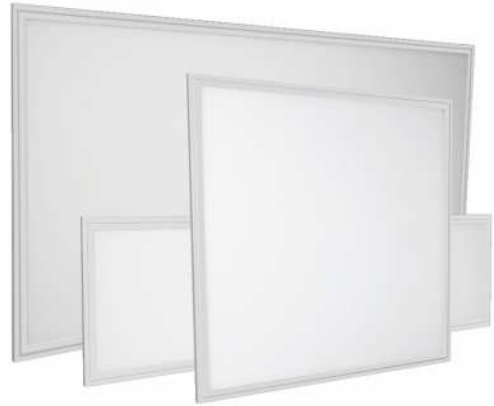

## Applications

- Office
- Commercial Building
- Industrial Buildings
- Back of house
- Hotels
- Store Rooms
- IT Room
- Retail

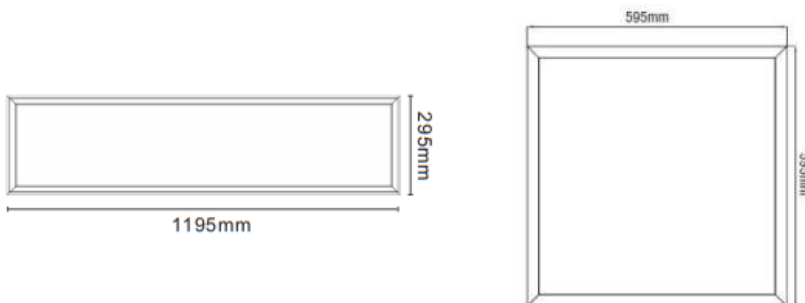


Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-FP0618/40	18W	1800lm	595 x 295 x 11 mm	2kg	NO	4000K	50,000H
BL-FP606036/40	36W	3600lm	595 x 595 x 11 mm	4Kg	NO	4000K	50,000H
BL-FP1236/40	36W	3600lm	1195 x 295 x 11 mm	3Kg	NO	4000K	50,000H
BL-FP126072/40	72W	7200lm	1195 x 595 x 11 mm	7Kg	NO	4000K	50,000H






## Indirect/Direct Glare-Free Panel

- PMMA Lens, Steel frame
- UGR16 glare-free
- White or Black Finish
- L70, 50.000hrs
- Polycarb base, Opal diffuser
- Stainless Clips & mounting kit
- Direct Light 90°
- CRI 90
- IP44/IK05 rating
- 3000k -6500 k
- 140lm/w
- Dali
- Surface or Suspended options



## Applications

- Office
- Commercial Building
- Industrial Buildings
- Hotels
- Retail

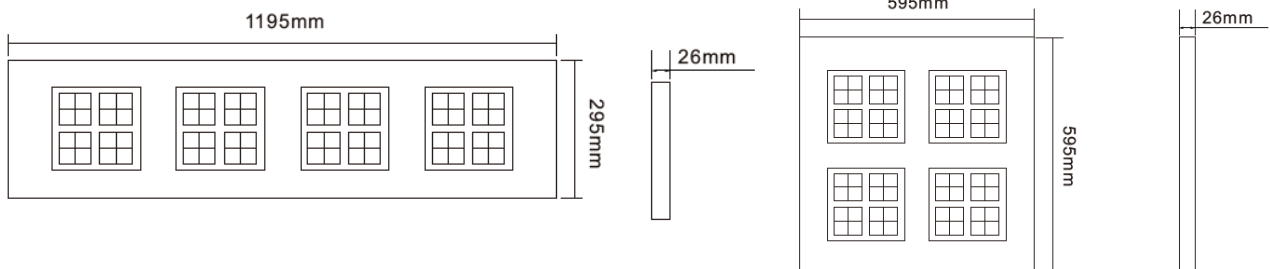

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-LAF1-R120-039C/40	35W	4200lm	1195 x 295 x 26 mm	3.5Kg	DALI	4000K	50,000H
BL-LAF1-R030-020C/40	26W	3640lm	595 x 595 x 26 mm	1.7Kg	DALI	4000K	50,000H








## LED Grille Panel

- Anti-glare Design, UGR19
- High lumen efficiency, 120lm/w
- Beam angle 80°
- SMD chip
- L70, 50.000hrs
- CRI 80
- IP40/IK06
- 3000k -5700k
- Dali
- Recessed, Surface or suspended options



## Applications

- Office
- Schools
- Commercial Building
- Industrial Buildings
- Hotels
- Retail
- Hospital

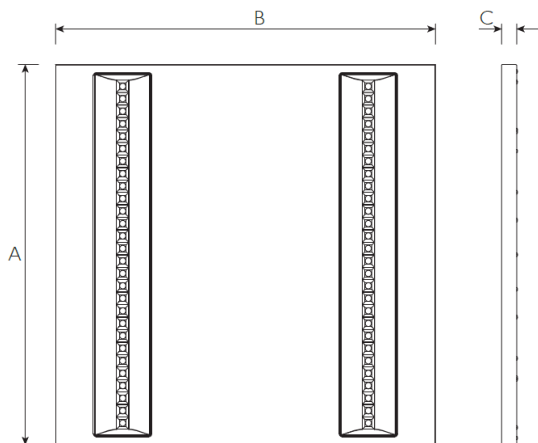

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-UP-GLP30120/35W/40	35W	4200lm	1195 x 295 x 23 mm	3.5Kg	Dali	4000K	50,000H
BL-UP-GLP6262/35W/40	35W	4200lm	595 x 595 x 23 mm	3.65Kg	Dali	4000K	50,000H




## TR50 Anti-Glare Troffer

- PMMA Lens, White Steel frame
- UGR16
- Occupancy Sensor Option
- Bluetooth Option
- L80, 50.000hrs
- Direct Light 85°
- CRI 80-90
- 3000k -5000 k
- 130lm/w
- Dali
- Recessed



## Applications

- Office
- Commercial Building
- Hospitals
- Schools
- Hotels
- Retail

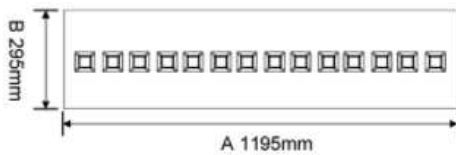

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-TR50-14-38/40	38 W	4560lm	1195 x 295 x 37 mm	3.5Kg	NO	4000K	50,000H








***Pendant*** \_\_\_\_\_

## Round LED Pendant Light

- Ultraslim Design
- Aluminium Frame & PMMA diffuser
- 300mm - 1200mm Size options
- SMD chip
- L70, 50.000hrs
- CRI 80
- IP44
- 3000k - 6000k
- Suspended

## Applications

- Office
- Foyer
- Hotel
- Retail
- Schools
- Commercial Building
- Hospital

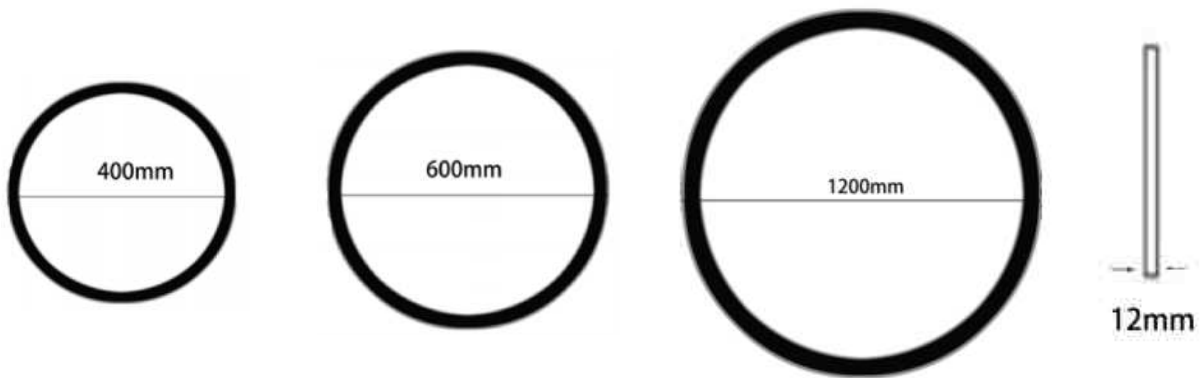

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-SW-BRPL-400/26W/4K	26W	2600lm	400 x 12 mm	Kg	NO	4000K	50,000H
BL-SW-BRPL-600/60W/4K	40W	5000lm	600 x 12 mm	Kg	NO	4000K	50,000H
BL-SW-BRPL-1200/75W/4K	85W	8500lm	1200 x 12 mm	Kg	NO	4000K	50,000H





***Battens*** \_\_\_\_\_


## LED Batten

- Transparent Opal Poly diffuser
- SMD Chips
- Powder coated steel base
- Large 6 mm terminal block
- Side & Top cable entry
- CRI 80
- L70 B50 50,000hrs
- IP20 rating
- Surface Mount or Suspended option



## Applications

- Offices
- Commercial
- Industrial
- Residential
- Car parks
- Garages
- Stairwells
- Hospitals

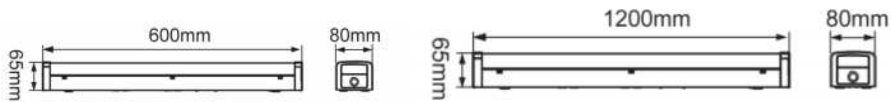


Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-EN-BN621/40	21W	1900lm	600 x 80 x 65 mm	4kg	NO	4000K	50,000H
BL-EN-BN1242/40	42W	3800lm	1200 x 80 x 65 mm	7kg	NO	4000K	50,000H





**BOUNCE**  
LIGHTING

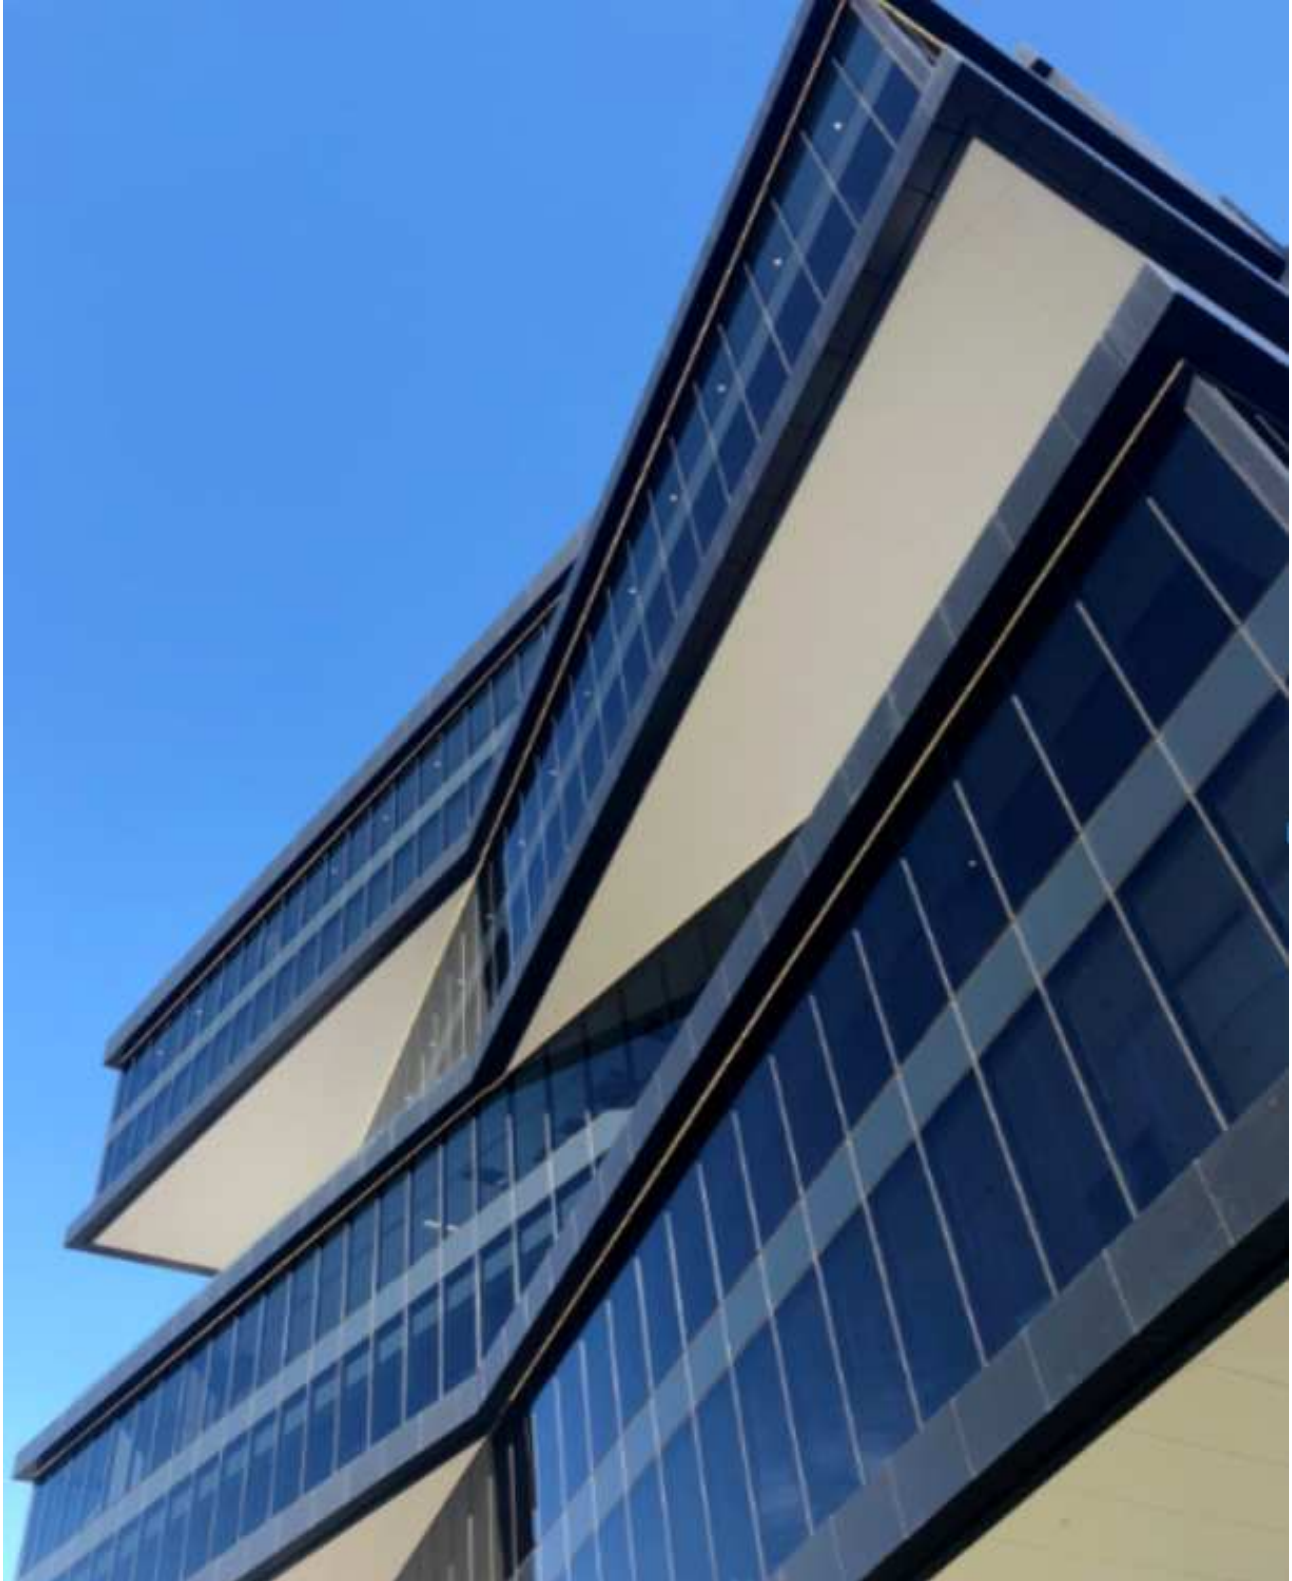

***LED Strips*** \_\_\_\_\_


## High Lumen LED Strip

- LED Strip 12-24vDC
- 2700-6000K
- CRI 80 -90
- Not Dotting
- IP20-IP65 Nano coated
- Top Illumination
- 5w-30w Per Meter
- Multiple profiles available
- Made to order to project specification
- 50mm cutting increments
- IP65 Hand Rail Options
- Dali
- Surface or Corner Mount
- Recessed Cabinet or Plaster



## Applications

- Feature Lighting
- Kitchens & Bathrooms
- Residential Apartments
- Architectural
- Office
- Cove Lighting
- Mirrors

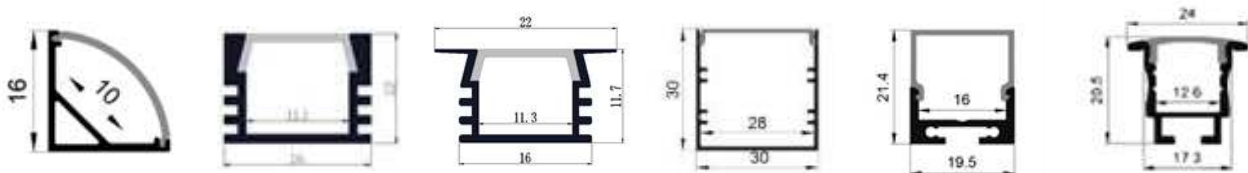

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime L70 B50
BL-SW-LS-24V-5W/40	5W	480lm	8 mm wide	24v	NO	4000K	50,000H
BL-SW-LS-24V-10W/40	10W	960lm	8 mm wide	24v	NO	4000K	50,000H
BL-SW-LS-24V-15W/40	15W	1450lm	8 mm wide	24v	NO	4000K	50,000H
BL-SW-LS-24V-20W/40	20W	2200lm	10 mm wide	24v	NO	4000K	50,000H
BL-SW-LS-24V-30W/40	30W	3100lm	12 mm wide	24v	NO	4000K	50,000H







*Opera Residences\_LED Strip*





*Neon Flex* \_\_\_\_\_


## LED Neon Flex Strip Side View 05\*11(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Top or Side Illumination
- Flexible Silicon
- PCB Width (mm) 8
- Weight (g/m)
- Made to order
- Dali
- Surface Mount or curved profile



## Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features



Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	8 mm wide	24v	NO	4000K	50,000H




## LED Neon Flex Strip Side View 05\*13(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Top or Side Illumination
- Flexible Silicon
- PCB Width (mm) 10
- Weight (g/m) 55
- Made to order
- Dali
- Surface Mount or curved profile



## Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

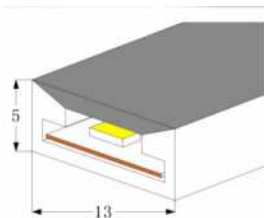

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	10 mm wide	24v	NO	4000K	50,000H





## LED Neon Flex Strip Side View 05\*15(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Top or Side Illumination
- Flexible Silicon
- PCB Width (mm) 12
- Weight (g/m) 60
- Straight or Curved Mounting  
Profile available
- Made to order
- Dali
- Surface or Curved Mount profile



## Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

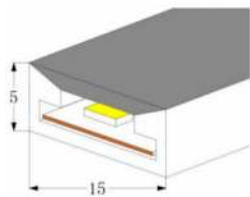

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	12 mm wide	24v	NO	4000K	50,000H








*Opera Residences\_Neon Flex*

## LED Neon Flex




### Side View 10\*10(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Lighting Direction:Positive
- Flexible Silicon
- PCB Width (mm) 6
- Weight (g/m) 100
- Made to order
- Dali
- Surface or Curved Mount profile

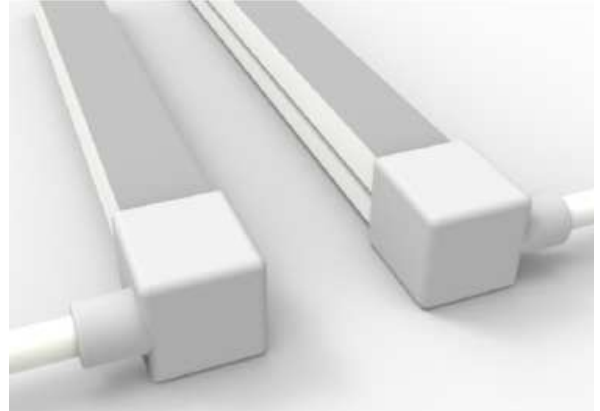


### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

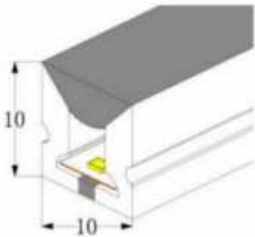

End cap with hole



End cap no hole



Aluminum clip


Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	6 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	6 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	6 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex




### Side View 3 sides 10\*10(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Lighting Direction:3 sides Positive lighting
- Flexible Silicon
- PCB Width (mm) 6
- Weight (g/m) 100
- Made to order
- Dali
- Surface or Curved Mount profile

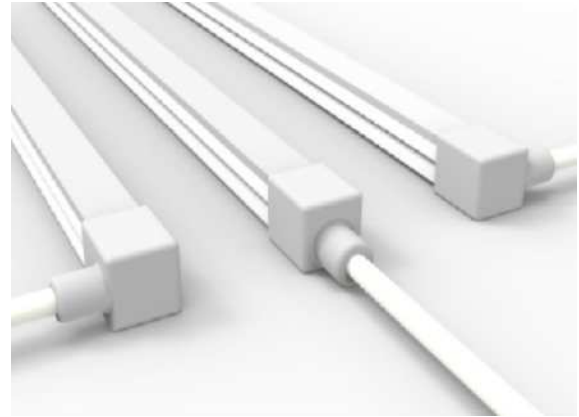


### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

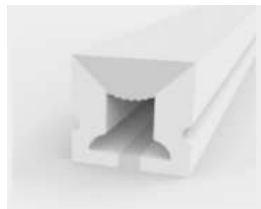

End cap with hole



End cap no hole



Aluminum clip

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	6 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	6 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	6 mm wide	24v	NO	4000K	50,000H






## LED Neon Flex




### Side View 3 sides 12\*12(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Lighting Direction:3 sides Positive lighting
- Flexible Silicon
- PCB Width (mm) 8
- Weight (g/m) 130
- Made to order
- Dali
- Surface or Curved Mount profile

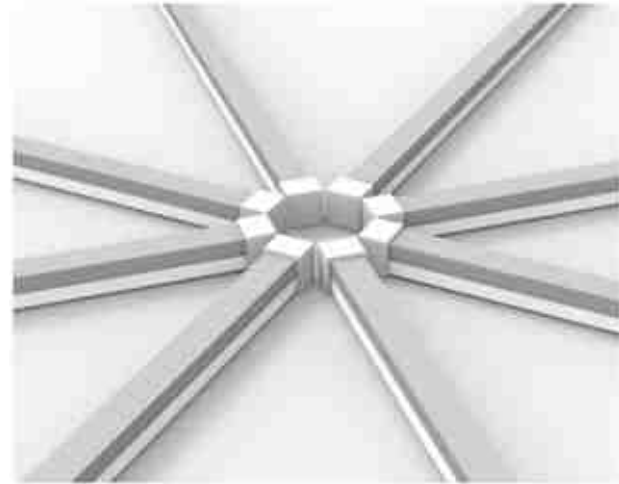


### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

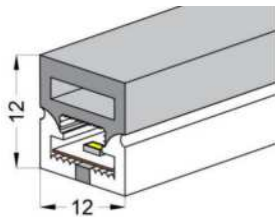

End cap with hole



End cap no hole



Aluminum clip



Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	8 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex




### Side View 16\*16(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Lighting Direction:3 sides
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 10/12
- Weight (g/m) 263
- Made to order
- Dali
- Surface or Curved Mount profile




### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features



End cap with hole



End cap no hole



Aluminum clip



Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	10-12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	10-12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	10-12 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex



### Side View 20\*14(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Lighting Direction:3 sides  
Positive lighting
- Flexible Silicon
- PCB Width (mm) 10/12
- Weight (g/m) 230
- Made to order
- Dali
- Surface or Curved Mount profile




### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

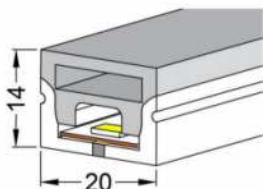

End cap with hole




End cap no hole



Aluminum clip

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	10-12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	10-12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	10-12 mm wide	24v	NO	4000K	50,000H



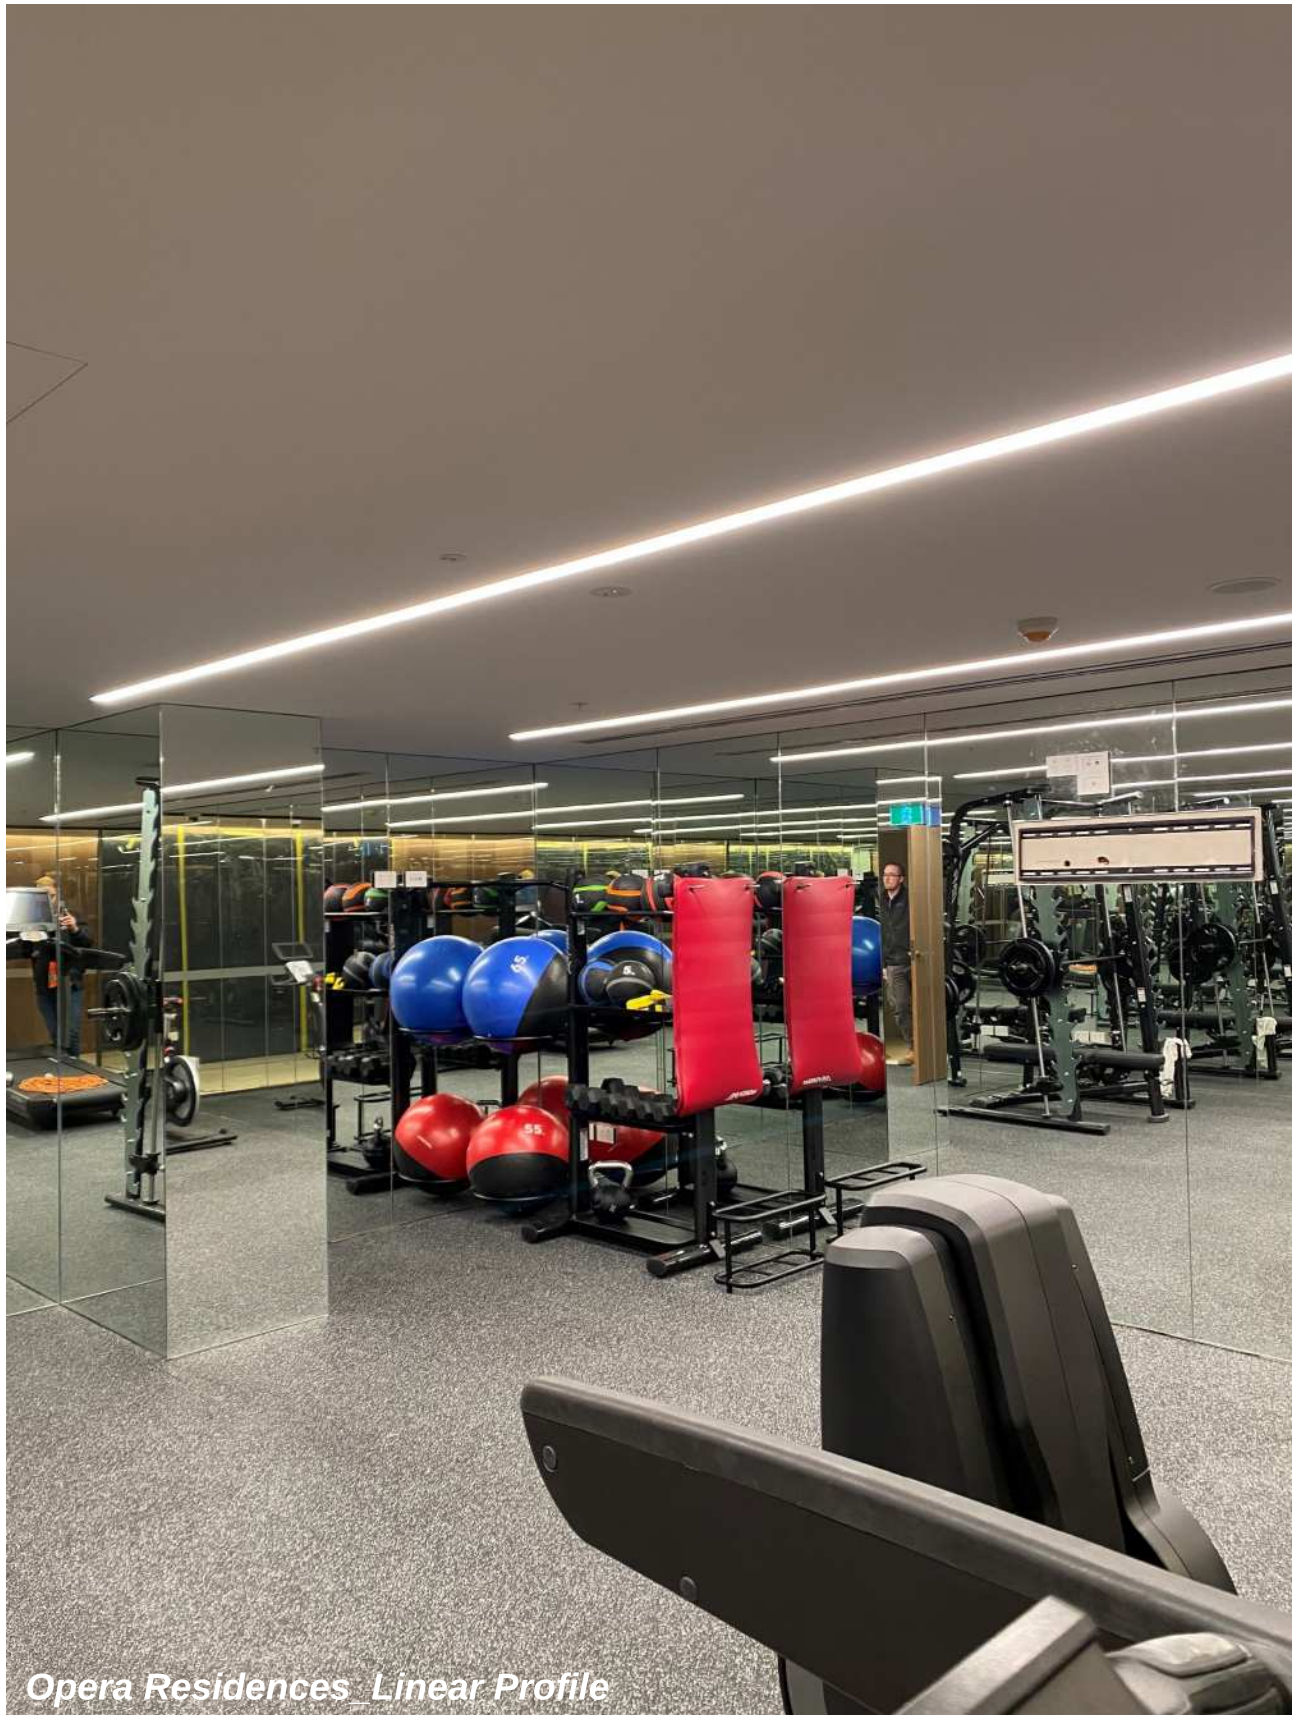


*Opera Residences \_ Linear Profile*

## LED Neon Flex


### Side View 04\*10(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Flexible Silicon
- PCB Width (mm) 5
- Weight (g/m)35
- Made to order
- Dali
- Surface or Curved Mount profile

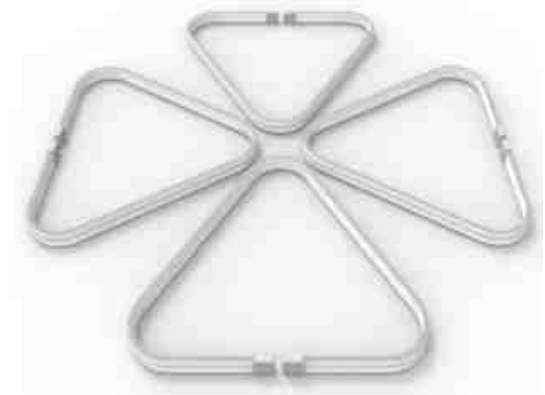

### Applications


- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

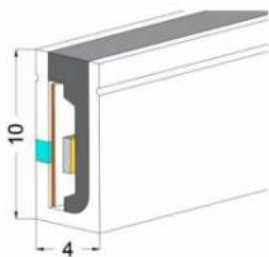

End cap with hole



End cap no hole



Aluminum clip

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	5 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	5 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	5 mm wide	24v	NO	4000K	50,000H






## LED Neon Flex



### Side View 06\*12(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 8
- Weight (g/m)90
- Made to order
- Dali
- Surface or Curved Mount profile

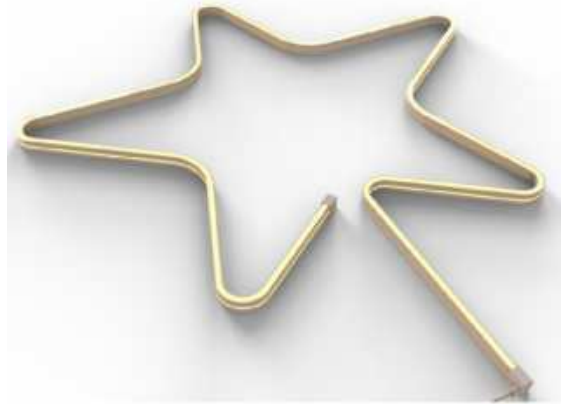

### Applications


- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

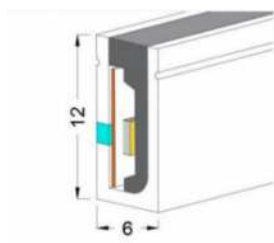

End cap with hole



End cap no hole




Aluminum clip



Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	8 mm wide	24v	NO	4000K	50,000H




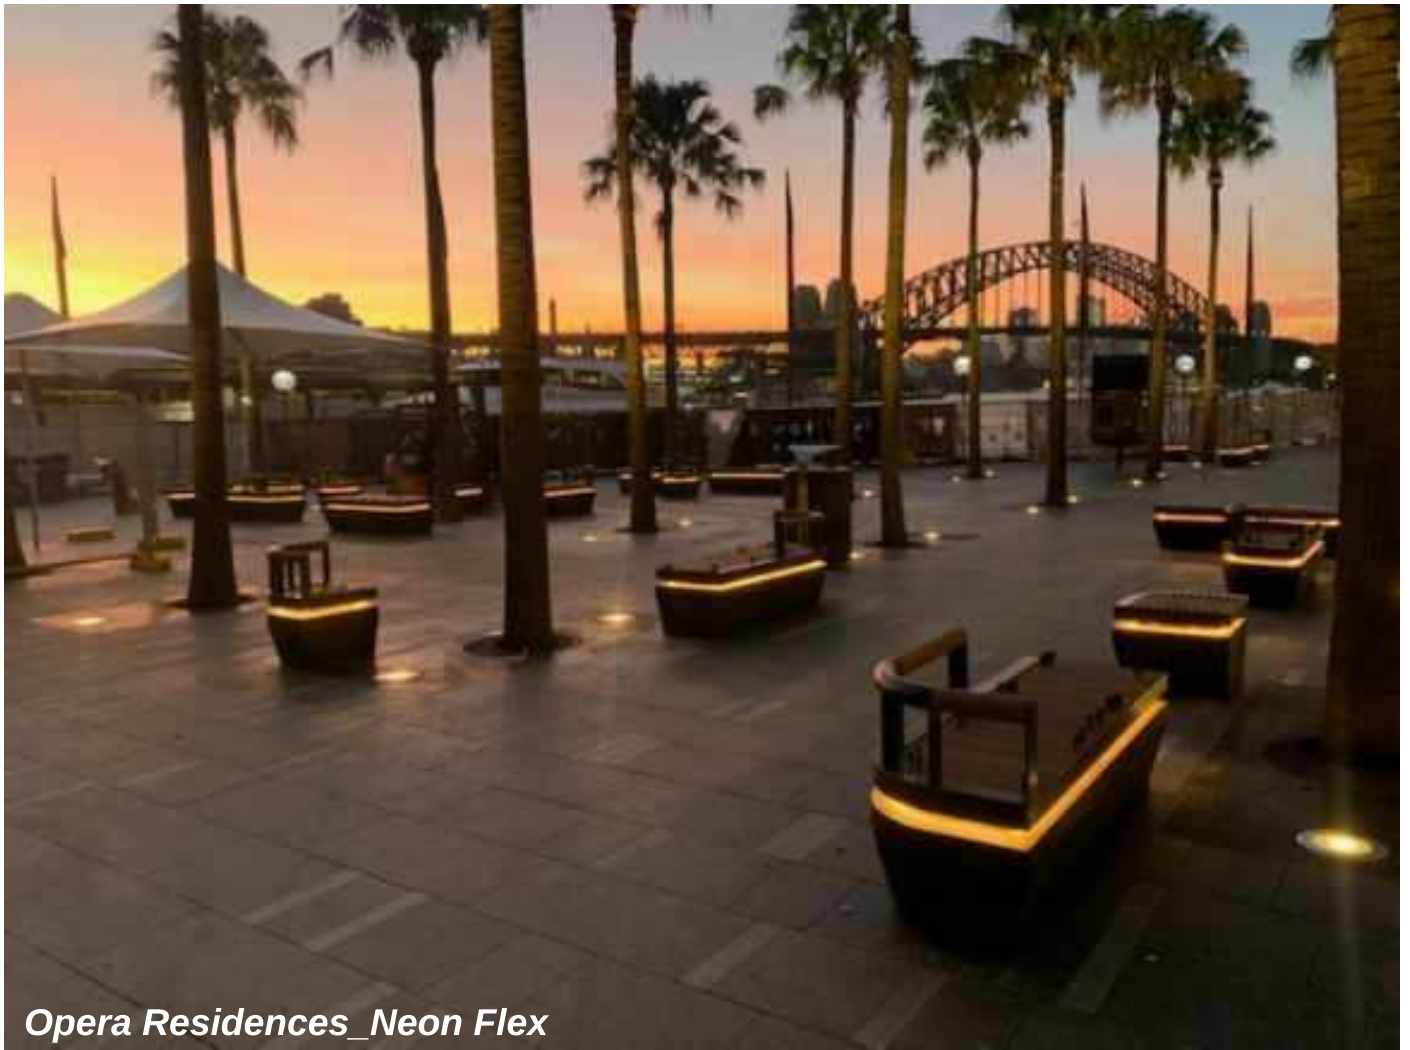

## LED Neon Flex



### Side View 06\*13(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 8
- Weight (g/m)75
- Made to order
- Dali
- Surface or Curved Mount profile

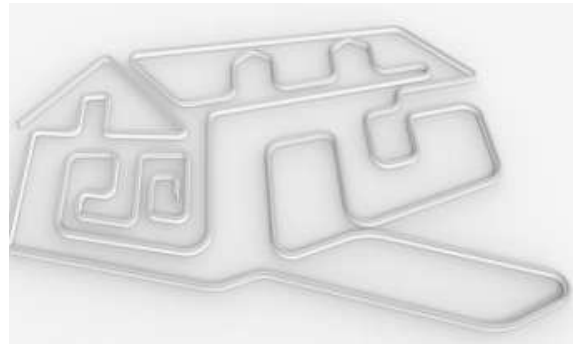


### Applications


- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

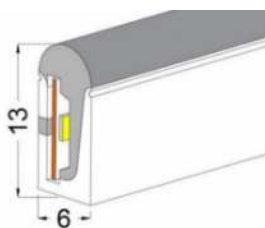

End cap with hole



End cap no hole



Aluminum clip


Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	8 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex




### Side View 10\*18(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm)10
- Weight (g/m)190
- Made to order
- Dali
- Surface or Curved Mount profile

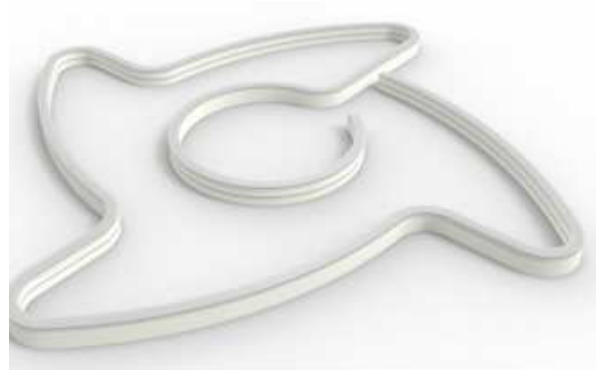


### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

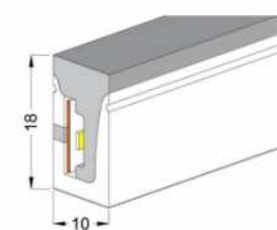

End cap with hole



End cap no hole



Aluminum clip


Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	10 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex



### Side View 12\*20(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 10
- Weight (g/m)230
- Made to order
- Dali
- Surface or Curved Mount profile

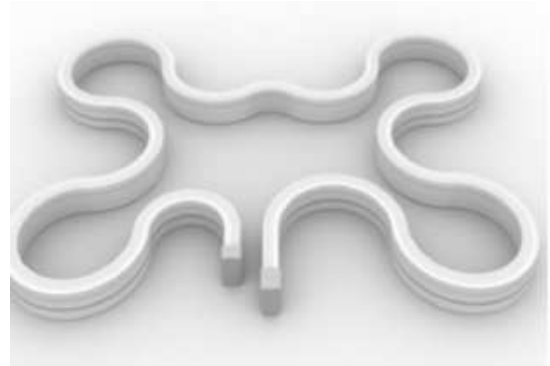


### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

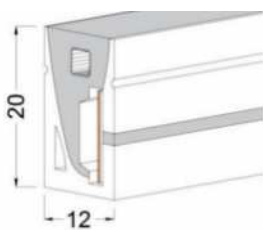

End cap with hole



End cap no hole



Aluminum clip



Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	10 mm wide	24v	NO	4000K	50,000H






## LED Neon Flex


### Side View 08\*15(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 5
- Weight (g/m)140
- Made to order
- Dali
- Surface or Curved Mount profile

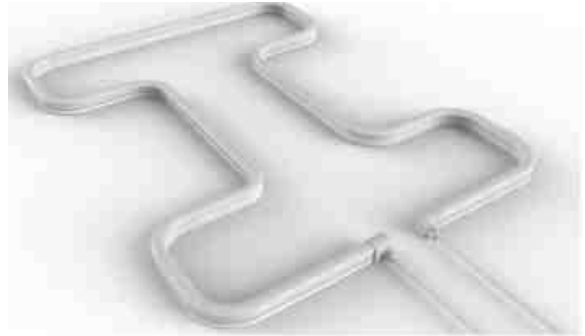

### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features



End cap with hole



End cap no hole



Aluminum clip

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	5 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	5 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	5 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex


### Side View 10\*23(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 10
- Weight (g/m)240
- Made to order
- Dali
- Surface or Curved Mount profile



### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

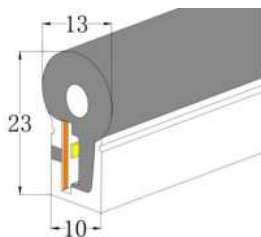

End cap with hole



End cap no hole Aluminum clip



Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	10 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	10 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex


### Side View 12\*25(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Edge Lighting
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 12
- Weight (g/m)280
- Made to order
- Dali
- Surface or Curved Mount profile



### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features



End cap with hole

End cap no hole

Aluminum clip

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	12 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	12 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex



### Side View 13\*13(mm)

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 8
- Weight (g/m)125
- Made to order
- Dali
- Surface or Curved Mount profile



### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features

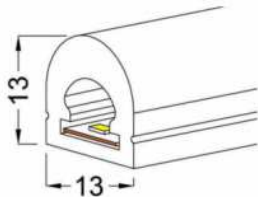

End cap with hole



End cap no hole



Aluminum clip


Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	8 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	8 mm wide	24v	NO	4000K	50,000H



## LED Neon Flex


### Side View 13(mm) 360

- LED Neon Flex
- 2700-6000K
- CRI 80-90
- IP68 rating
- Positive lighting
- Flexible Silicon
- PCB Width (mm) 5
- Weight (g/m)125
- Made to order
- Dali
- Surface or Curved Mount profile

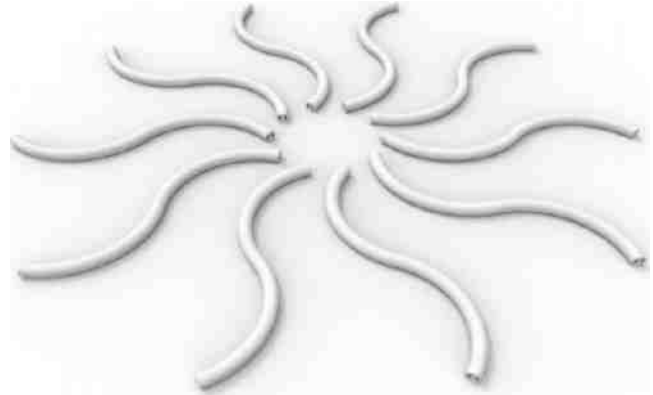

### Applications

- Feature Lighting
- Garden Benches
- Architectural
- Curved Ceiling Coves
- Mirrors
- Water Features



End cap with hole



End cap no hole




Plastic clip

Item Code	Wattage	Lumen	Dimensions	Voltage	Dimming	Colour Temp	Lifetime
BL-NF-24V-5W/40	5W	480lm	5 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-10W/40	10W	960lm	5 mm wide	24v	NO	4000K	50,000H
BL-NF-24V-15W/40	15W	1450lm	5 mm wide	24v	NO	4000K	50,000H





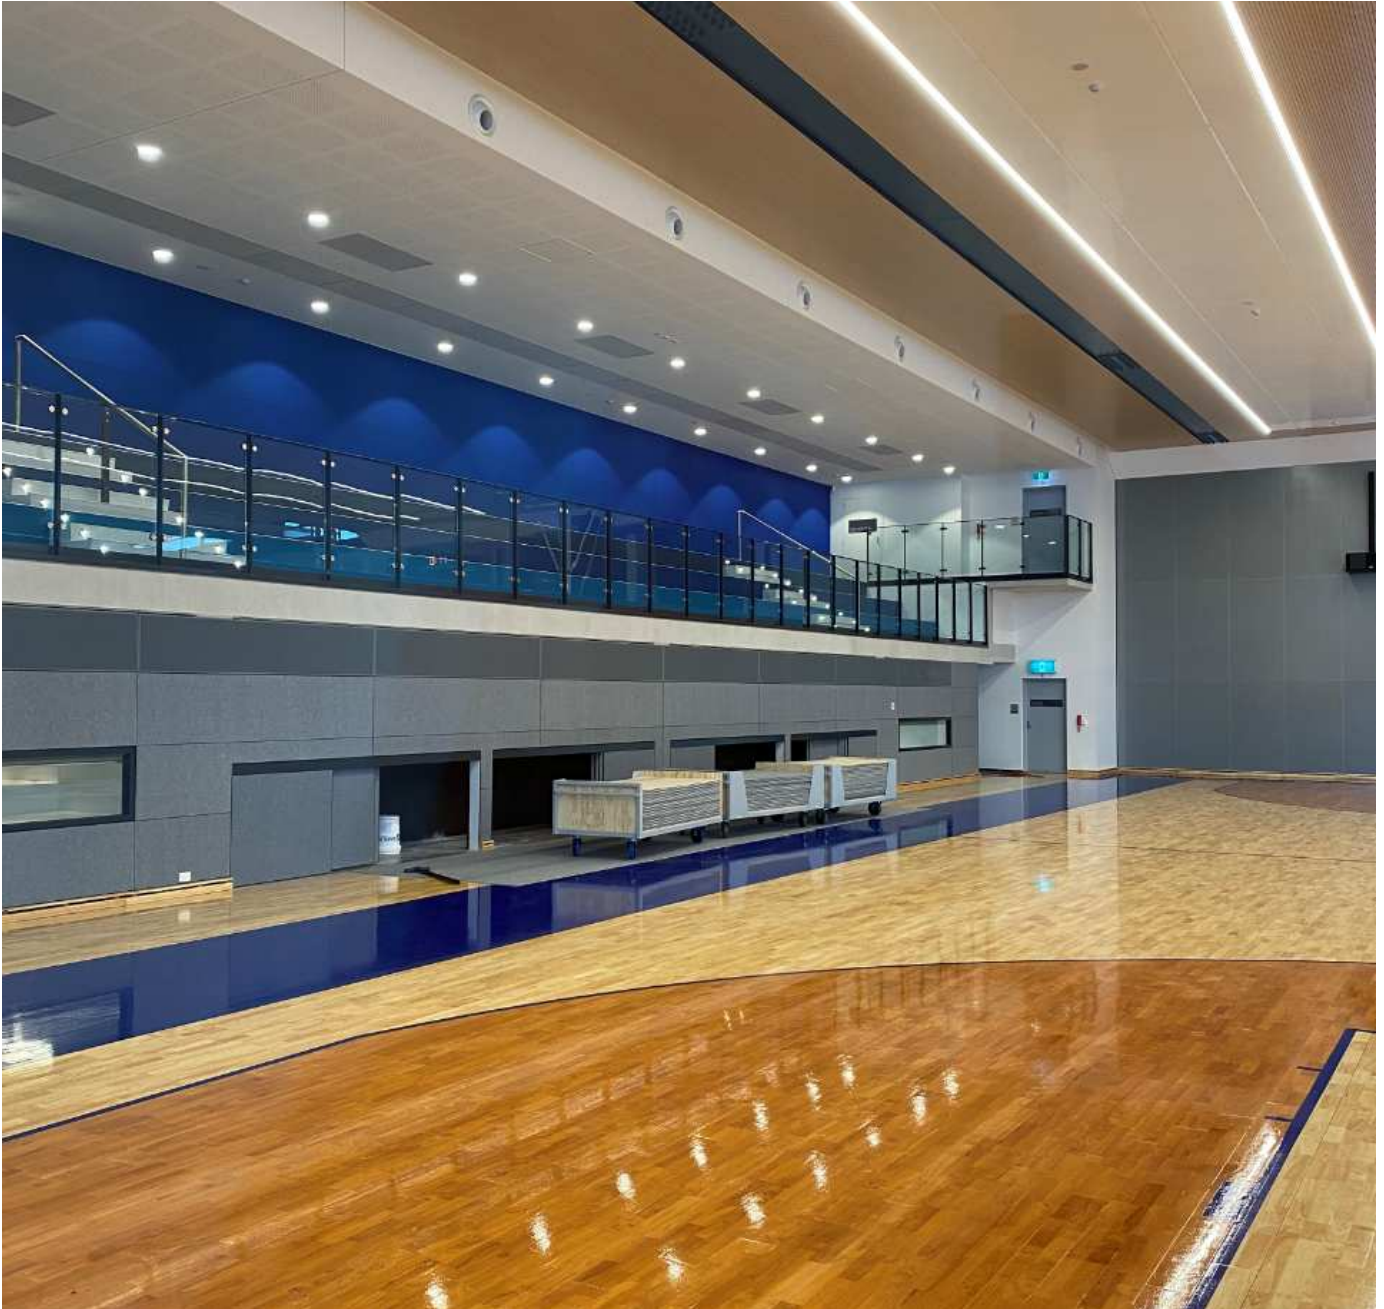

***Linear LED Range***



---

## LED Linear Pro Recessed

- Aluminum Profile & Reeded Diffuser or Louvre Options
- Power Coated Finish
- Plug & Play System
- Recessed option
- 1.2m, 1.5m & 3m modules
- 17w-25w
- Direct/Indirect optics
- Motion & Daylight integration
- Dali Dimming option
- High efficiency LED 130Lm/w
- Colour Matt white or black
- Dali
- Recessed

## Applications

- Office
- Reception
- Education
- Communication areas
- Board Room
- General Area

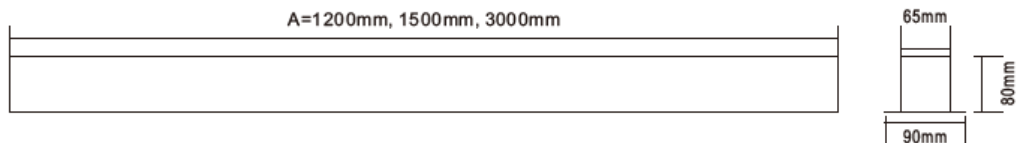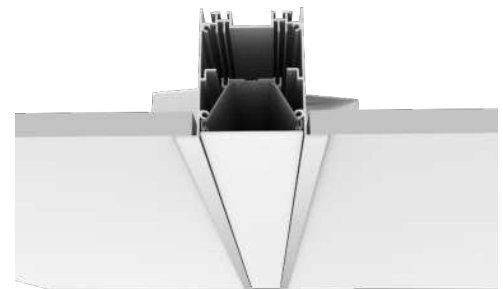


Item Code	Wattage	Lumen	Dimensions	Mounting	Dimming	Colour Temp	Lifetime L70 B50
BL-SD-PLF2-D120-032A/40	19-27W	2400-3200lm	1200 x 65 x 80 mm	Recessed	DALI	4000K	50,000H
BL-SD-PLF2-D150-040A/40	25-31W	3000-4000lm	1500 x 65 x 80 mm	Recessed	DALI	4000K	50,000H
BL-SD-PLF2-D300-080A/40	48-68W	6000-8000lm	3000 x 65 x 80 mm	Recessed	DALI	4000K	50,000H





## LED Linear Pro Direct/Indirect

- Aluminum Profile & Reeded Diffuser
- Microprism PMMA
- Power Coated Finish
- Plug & Play System
- Surface or Suspended options
- 1.2m, 1.5m & 3m modules
- 17-25w & 50-62w
- Direct/Indirect optics
- Motion & Daylight integration
- High efficiency LED 130Lm
- Dali
- Surface or Suspended

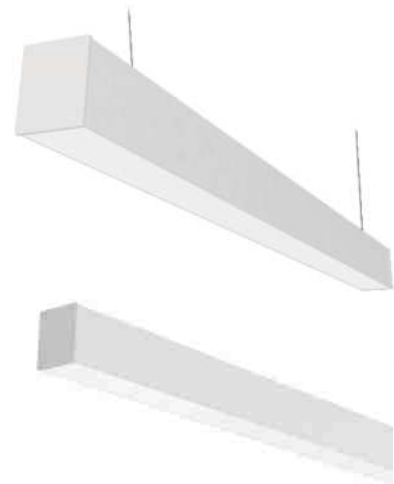

## Applications


- Data Centres
- Office
- Reception
- Kitchen Bench
- Feature
- Show Rooms
- Board Room
- General Area



Item Code	Wattage	Lumen	Dimensions	Mounting	Dimming	Colour Temp	Lifetime L70 B50
BL-SD-PLF1-D120-032A/40	17-25w	2400-3200lm	1200 x 65 x 80 mm	Surface	DALI	3-6000K	50,000H
BL-SD-PLF1-D150-040A/40	25-31 w	3000-4000lm	1500 x 65 x 80 mm	Surface	DALI	3-6000K	50,000H
BL-SD-PLF1-D300-080A/40	50-62w	6000-8000lm	3000 x 65 x 80 mm	Surface	DALI	3-6000K	50,000H
BL-SD-PLF1-D120-032A/40	17-25w	2400-3200lm	1200 x 65 x 80 mm	Suspended	DALI	3-6000K	50,000H
BL-SD-PLF2-D150-040A/40	25-31w	3000-4000lm	1500 x 65 x 80 mm	Suspended	DALI	3-6000K	50,000H
BL-SD-PLF2-D300-080A/40	50-62w	6000-8000lm	3000 x 65 x 80 mm	Suspended	DALI	3-6000K	50,000H





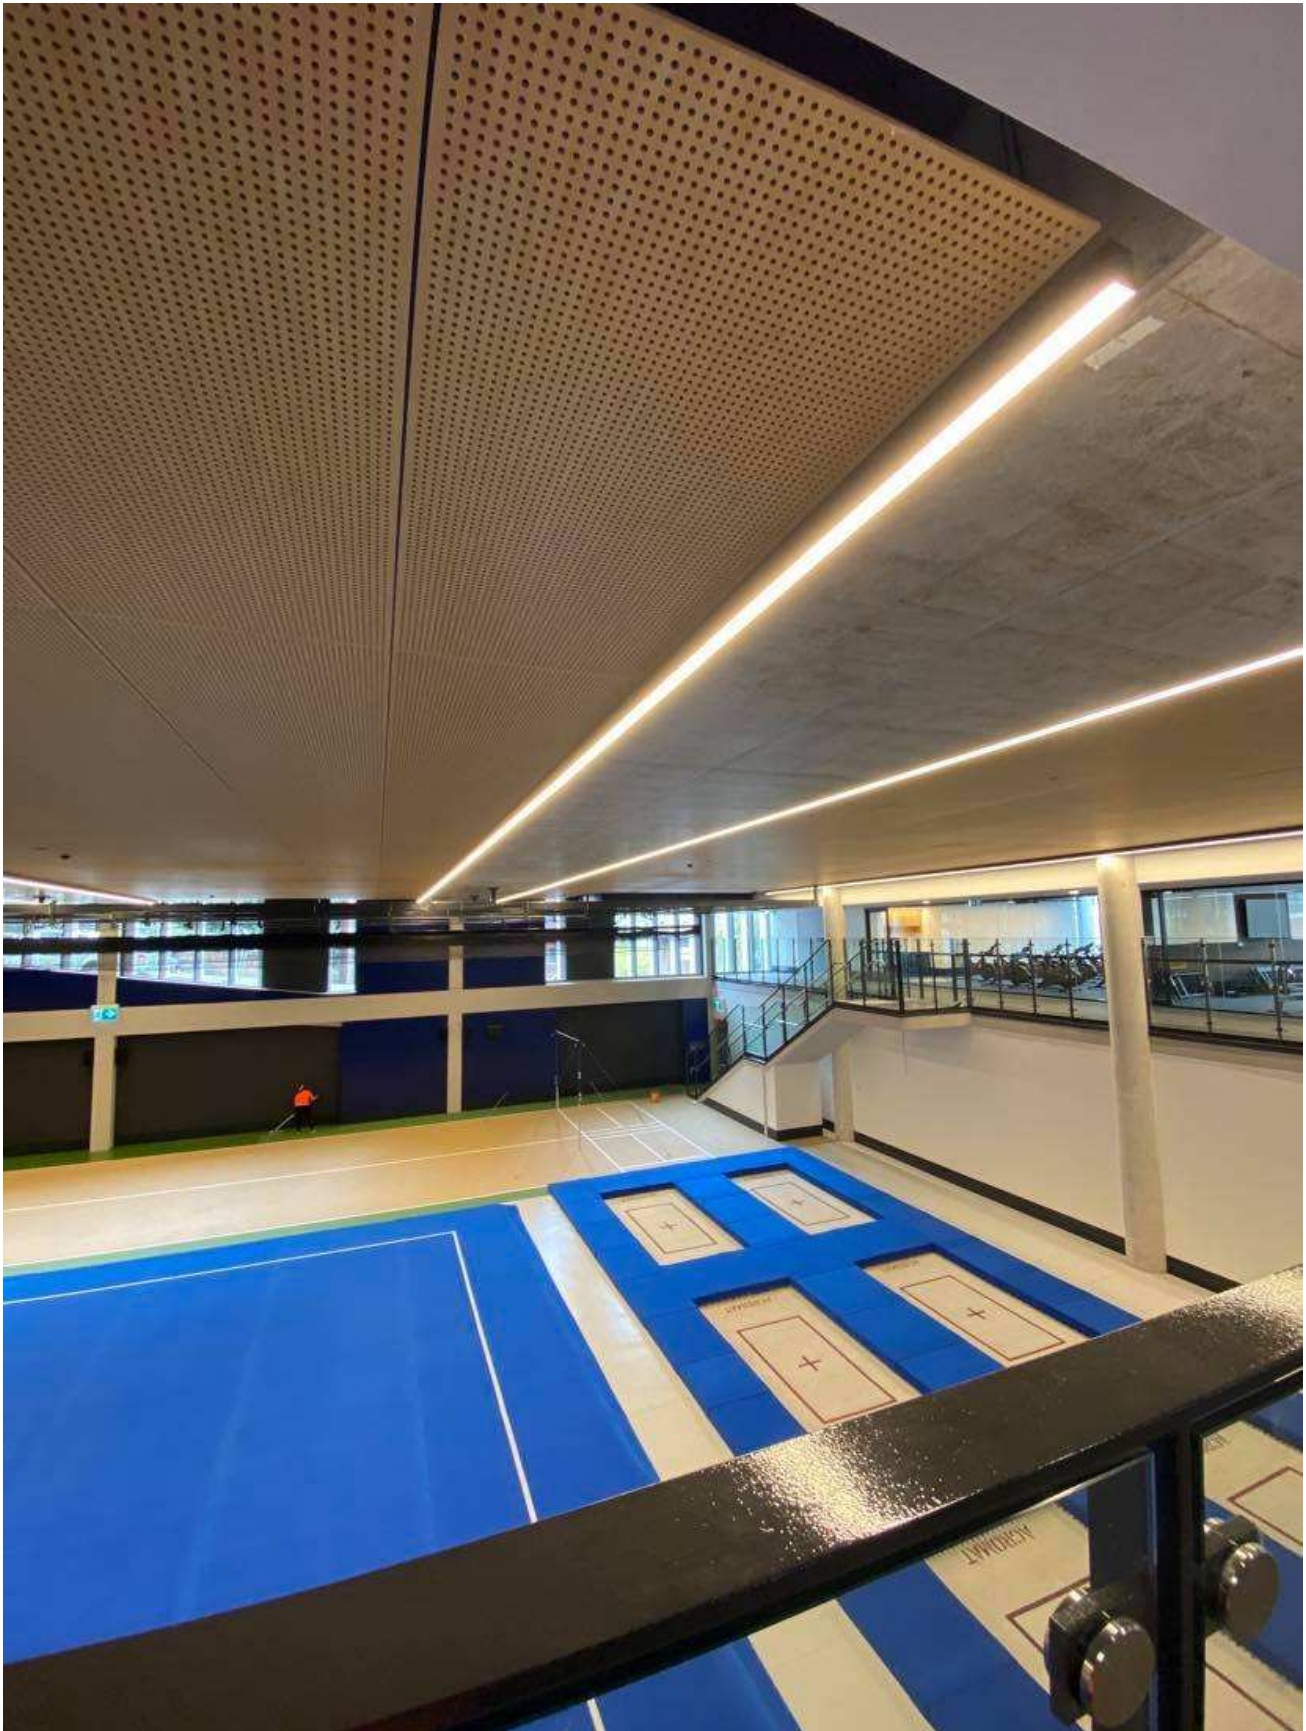


## Linear Trunking System

- 40W-75W
- 130lm/w
- Led linkable Module
- Multiple beam angle
- Anti glare function
- Maximum connecting quantity 210pc (240VAC) Three phase and single phase 70pcs
- Dali
- Suspended



## Applications

- Indoor high ceiling application
- Warehouse
- Factories
- Industrial facility
- Exhibition centers
- Supermarkets and malls

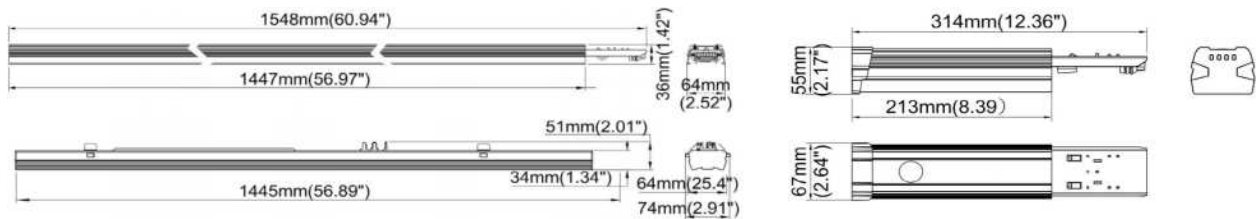

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-LHB04-040W	40W	5200lm	0	0	NO	3-5000K	50,000H
BL-LHB04-040W/D	40W	5200lm	0	0	DALI	3-5000K	50,000H
BL-LHB04-065W	65W	8450lm	0	0	NO	3-5000K	50,000H
BL-LHB04-065W/D	65W	8450lm	0	0	DALI	3-5000K	50,000H
BL-LHB04-075W	75W	9750lm	0	0	NO	3-5000K	50,000H
BL-LHB04-075W/D	75W	9750lm	0	0	DALI	3-5000K	50,000H





## Linear Trunking Accessories

- 5 Wires for non-dim
- 7 wires for DALI Dimmable
- Length 1.1447mm

Trunkings



## Feed In Trunking

- 5 wires for non-dim
- 7 wires for DALI Dimmable
- Length 1.314mm

Feed-in Trunking



## Blank Cover

- Plastic blank cover for both versions
- Length 1.445mm

Blank Cover



Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BI-TS-L04-01	0	0	0	0	NO	0	0
BL-TSL04-02D	0	0	0	0	DALI	0	0
BL-TF-L04-01	0	0	0	0	NO	0	0
BL-TF-L04-02D	0	0	0	0	DALI	0	0
BL-BC-L04-01	0	0	0	0	NO	0	0
BL-L04-01D	0	0	0	0	DALI	0	0




*Healthcare*\_\_\_\_\_

## OverBed Wall Profile Light

- Architectural Linear Bed Light
- Direct/Indirect Optics
- Anodised Silver Dulux Powdercoat
- Opal polycarbonate diffuser insert
- Dali
- Surface Mount
- Made to Order -custom lengths as required

## Applications

- Hospitals
- LED upgrades
- Nursing Homes
- Home Care
- Emergency Wards
- Medical Centre

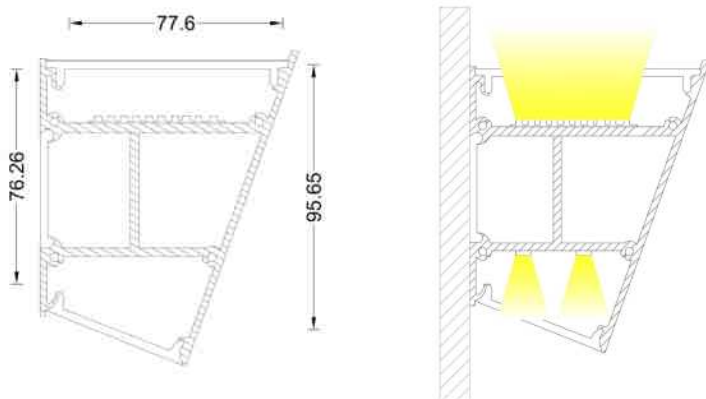

Item Code	Dimensions	Dimming	Colour Temp	Lifetime L70 B50
BL-HP3364/WM/SPECIAL	77.6 x 95.6 mm	DALI	4000K	50,000H




## OverBed Light

- Wall Mounted Bed Light
- Direct/Indirect Optics
- Die Cast Aluminum Body
- Reeded Diffuser
- Powder Coated White Finish
- IP44
- Dali
- Surface Mount

## Applications

- Hospitals
- LED upgrades
- Nursing Homes
- Home Care
- Emergency Wards
- Medical Centre

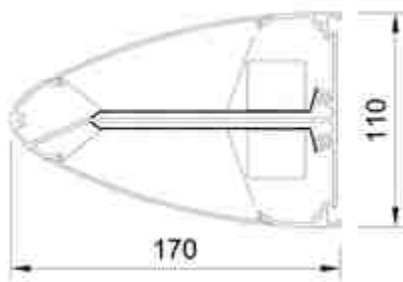

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-ND-100-43W.WMDA-900	43W	2408+1505lm	900 x 170 x 110 mm	5.0Kg	DALI	3000K	50,000H









**BOUNCE  
LIGHTING**



***Handrail Lighting*** \_\_\_\_\_




## Handrail Puk

- 316 Stainless Steel
- Curved Mounting Grommet
- IP67/IK06 Rated
- Asymmetric & Wide Beam
- Series Wiring
- 600mm spacings
- Dali
- Recessed in 48-60mm Round Balustrade



## Applications

- Residential
- Commercial
- Buildings
- Amenities
- Stairs
- Entry Areas

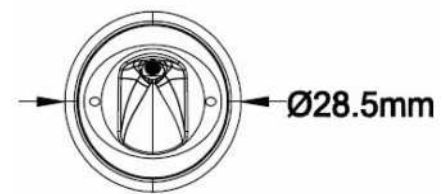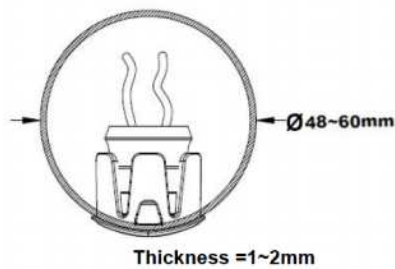

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime L70 B50
BL-ND-OPUS-R-ASY/40	1.5w	140lm	27 x 28 mm	0.1kg	NO	4000K	50,000H
BL-ND-OPUS-F-WIDE/40	1.5w	140lm	27 x 28 mm	0.1kg	NO	4000K	50,000H





***Exterior***\_\_\_\_\_






## IP67 Inground Mini Uplight

- 316 Stainless Steel
- Beam Angle 45°
- Symmetric distribution
- 90lm/w
- L70, 35,000hrs
- 1W or 3W option
- DC24V input
- 2700k - 6500k
- CRI 80
- IP67/IK06 Rated
- Dali
- Recessed

### Applications

- Residential
- Commercial
- Buildings
- Amenities
- Stairs
- Entry Areas

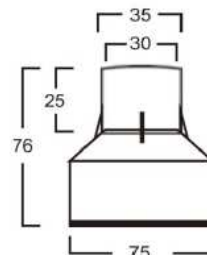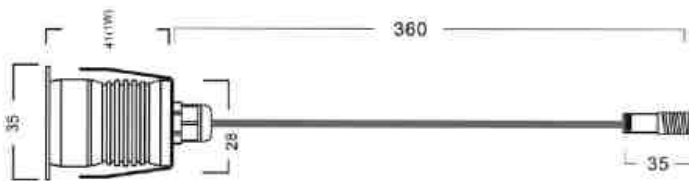

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime L70 B50
BL-KSUDL001-35/Y1WA/40	1W	90lm	35 x 38 x 28 mm	0.09Kg/0.12Kg	NO	4000K	50,000H
BL-KSUDL001-35/Y3WA/40	3W	270lm	35 x 38 x 28 mm	0.09Kg/0.12Kg	NO	4000K	50,000H



## IP65 LED Linear Wall Wash

- Anodized Aluminium Body
- Glass Lens & Adjustable Mounting Brackets
- Dark Grey Finish
- 15°/30°/60°/10°\* 60°/20°\* 45°
- 18W/24W/36W options
- 2700K-6500K options
- L70 50,000hrs
- CRI 80-90
- IP65
- Remote Driver options
- DC24V Input
- Surface



## Applications

- Museums
- Outdoor Facades
- Residential
- Security
- General Area Lighting



Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-KAS-VT-QXQ1801/4K	18W	1800LM	1000 x 57 x 36 mm	1.5Kg	NO	4000K	50,000H
BL-KAS-VT-QXQ2401/4K	24W	2400lm	1000 x 57 x 36 mm	1.7Kg	NO	4000K	50,000H
BL-KAS-VT-QXQ3601/4K	36W	3600lm	1000 x 57 x 36 mm	1.9Kg	NO	4000K	50,000H







***Weatherproof Battens*** \_\_\_\_\_


## LED Weatherproof Batten

- Polycarbonate Body & Opal Diffuser
- Stainless Steel Locking & Mounting Clips
- IP65 with IP68 Gland & Rubber Bung
- Emergency Options
- Microwave Options
- Dali Options
- High efficiency LED 95Lm/w
- Easy clip system
- Dali
- Surface or wall Mounted



## Applications

- Warehouse
- Car Parks
- Industrial Buildings
- Security
- Loading docks
- Back of House
- General Area Lighting

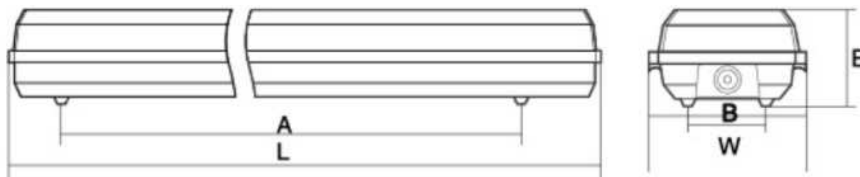

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-WP1224/40*	24W	2250LM	1260 x 130 x 93 mm	1.2Kg	NO	4000K	50,000H
BL-WP1248/40*	48W	4500lm	1260 x 130 x 93 mm	1.2Kg	NO	4000K	50,000H
BL-WP0624/40*	24W	2200lm	650 x 130 x 93 mm	0.6Kg	NO	4000K	50,000H
BL-WP1272/40*	72W	6400lm	1560 x 130 x 93 mm	1.4Kg	NO	4000K	50,000H





**BOUNCE  
LIGHTING**



***Highbays Lowbays*** \_\_\_\_\_




## UFO High Bay

- 50W-200W
- Lens made from optical grade polycarbonate light transmittance >98%
- Aluminium alloy Heat sink
- Multiple brackets
- Steel safety rope offers double protection
- Smart Control system 0-10VPWM Microwave motion sensor
- 150-160lm/w
- Dali
- Suspended



## Applications

- Indoor high ceiling application
- Warehouse
- Factories
- Industrial facility
- Exhibition centers

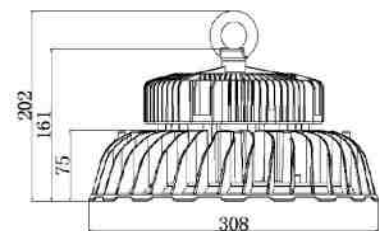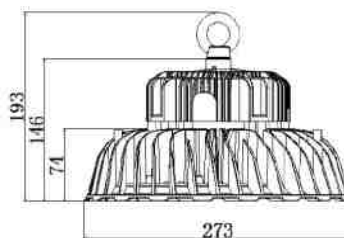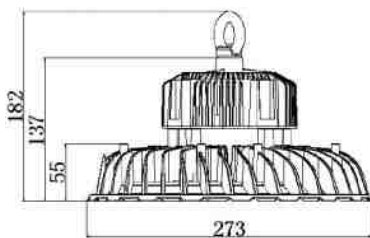

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-LP050-100W/120D/4K	50-100W	12000lm	273 x 182 mm	2.5kg	NO	3-6000K	50,000H
BL-LP0120-150W/120D/4K	120-150W	19200lm	273 x 182 mm	3.2kg	NO	3-6000K	50,000H
BL-LP0180-200W/120D/4K	180-200W	32000lm	273 x 182 mm	3.6kg	NO	3-6000K	50,000H






## LED Modular Linear Highbay

- 150W/200W/300W
- 155lm/W
- Low UGR
- IP65/IK10 rating
- Specialized Asymmetrical optic 40°x140° for aisle, workshop and warehouse
- Smart control all in one, including PIR, Microwave motion sensor, photocell,
- DALI, Emergency
- Suspended, Wall or Ceiling Mount



## Applications

- Indoor & outdoor high ceiling application
- Warehouse
- Factories
- Industrial facility
- Exhibition centers
- Stadiums
- Toll Stations

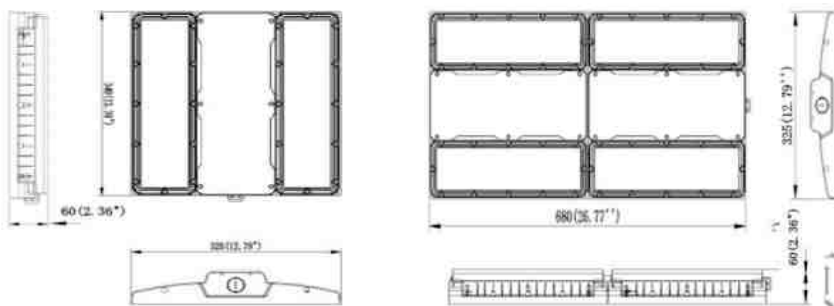

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime L70 B50
BL-LHB09-150	150W	23250LM	340 x 325 x 60 mm	3.7kg	NO	5000K	40,000H
BL-LHB09-200	200W	31000LM	680 x 325 x 60 mm	7.5kg	NO	5000K	40,000H
BL-LHB09-300	300W	46500LM	680 x 325 x 60 mm	7.8kg	NO	5000K	40,000H






## LED Low Bay

- Low Profile Design
- Tempered optical glass or Frosted
- Die Cast Aluminum Body & White Finish
- Wide Beam 120°
- High efficiency Philips LED
- 3000k or 5000k option
- CRI 80
- IP65/IK08 rating
- 130lm/w
- Dali
- Recessed or Surface Mount



## Applications

- Car Park Entry
- Service Stations
- Food Industry
- Loading docks
- Warehousing
- Factory/Manufacturing
- Service Stations

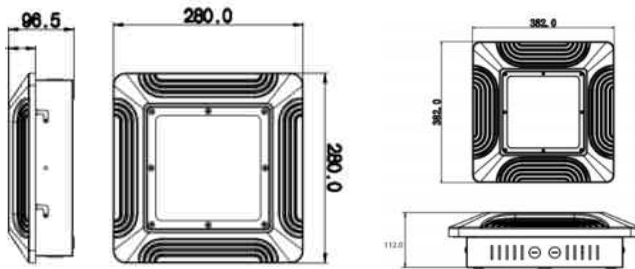

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-FL-XL-YZD50/40*	50W	6500lm	280 x 280 x 96.5 mm	2.7kg	NO	4000K	50,000H
BL-FL-XL-YZD80/40*	80W	10000lm	280 x 280 x 96.5 mm	2.9kg	NO	4000K	50,000H
BL-FL-XL-YZD100/40*	100W	13000lm	382 x 382 x 112 mm	3.9kg	NO	4000K	50,000H
BL-FL-XL-YZD120/40*	120W	15000lm	382 x 382 x 112 mm	3.9kg	NO	4000K	50,000H
BL-FL-XL-YZD150/40*	150W	19000lm	382 x 382 x 112 mm	3.9kg	NO	4000K	50,000H






***Floodlights Area light***\_\_\_\_\_

## Economy LED Floodlight

- Slim Design
- Tempered glass
- Die Cast Aluminum Body
- 120° Wide Beam
- Powder Coated Black Finish
- 3000-6000K
- High efficiency LED 110Lm/W
- CRI 80
- IP65
- Steel Trunnion Arm 320° adjustable Wall or Surface Mount

## Applications

- Warehouse
- Car Parks
- Industrial Buildings
- Security
- Loading docks
- Recreational Sports Venues
- Sport
- General Area Lighting

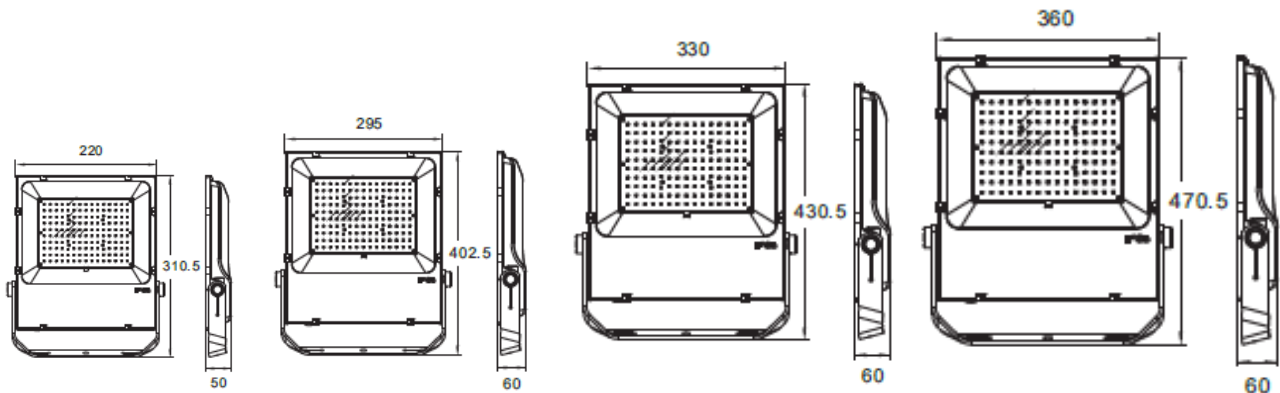

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime L70 B50
BL-FL050/40_ _	50W	5500lm	220 x 310 x 50 mm	1.9Kg	NO	4000K	50,000H
BL-FL100/40_ _	100W	11000lm	295 x 402 x 60 mm	1.24kg	NO	4000K	50,000H
BL-FL150/40_ _	150W	16500lm	330 x 430 x 60 mm	3.4Kg	NO	4000K	50,000H
BL-FL200/40_ _	200W	22000lm	360 x 470 x 60 mm	5.0Kg	NO	4000K	50,000H







**BOUNCE**  
LIGHTING



*Max Tennis Centre Dural \_FE-XL-SL9000-10/40*




## Premium LED Floodlight

- Tempered glass & Polycarb Optical Lens
- Aluminum Body
- Range 40W - 240W
- Powder Coated Black Finish
- 5000K (3000k,4000K optional)
- High efficiency LED 140Lm/W
- Asymmetrical or Symmetrical option
- IP66/IK08 rating
- CRI 70
- Dali
- Aluminium Alloy U type bracket and optional pole mounting bracket



## Applications

- Warehouse
- Car Parks
- Industrial Buildings
- Security
- Loading docks
- Recreational Sports Venues

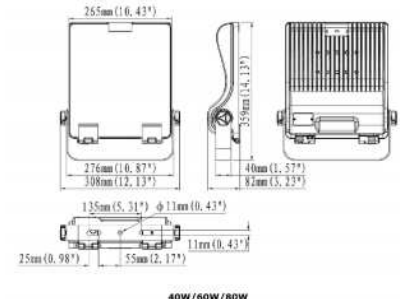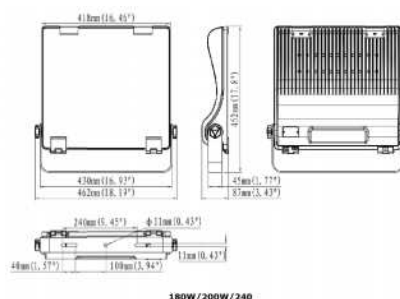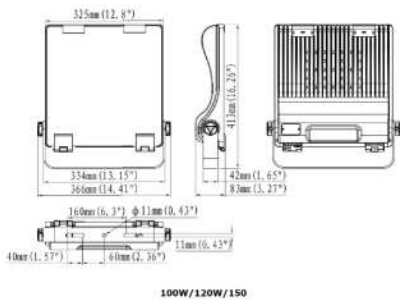

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime L70 B50
BL-AGC-FL08/80W/40_	80W	9600lm	359 x 308 x 82 mm	4.3+ 0.3Kg	NO	4000K	61,000H
BL-AGC-FL08/120W/40_	120W	14400lm	413 x 366 x 83 mm	6.5 + 0.3kg	NO	4000K	134,000H
BL-AGC-FL08/150W/40_	150W	18000lm	413 x 366 x 83 mm	6.8+0.3kg	NO	4000K	134,000H
BL-AGC-FL08/180W/40_	180W	21600lm	462 x 452 x 87 mm	8.4+ 0.3kg	NO	4000K	218,000H
BL-AGC-FL08/200W/40_	200W	24000lm	462 x 452 x 87 mm	8.6+ 0.3kg	NO	4000K	218,000H
BL-AGC-FL08/200W/40_	240W	28800lm	462 x 452 x 87 mm	8.9+ 0.3kg	NO	4000K	218,000H








## LED Sportz Flood

- High Output Sports Flood lights
- Acrylic Lens optics.
- Modular Design for Individual Aiming
- Die Cast Aluminum Body
- Optics 10° , 25° , 80x155°
- Powder Coated Black Finish
- High efficiency CREE LED
- Wi-Fi Control Options
- CRI 70
- 130lm/W
- 1-10v
- Adjustable Steel Trunnion Arm

## Applications

- Outdoor Sporting Fields
- Large Tennis Courts
- Football / Rugby / League
- Large Area Lighting / Ports

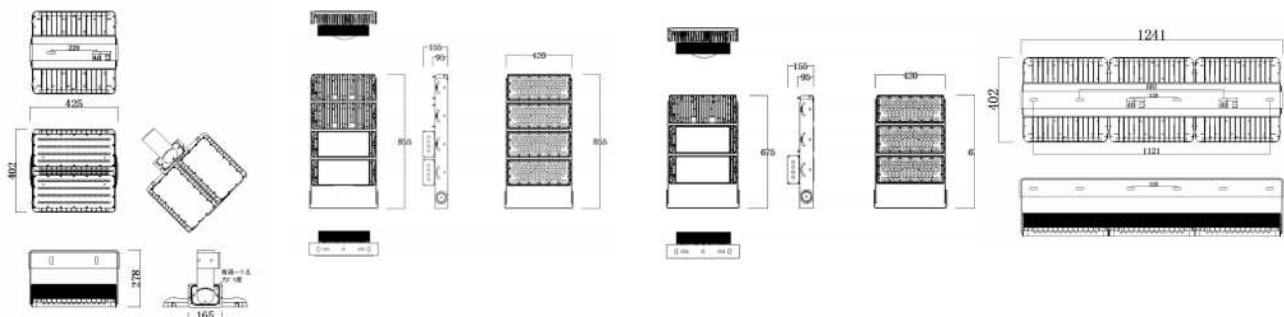

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime
BL-FE-XL-SL300_/_/40	300W	39000lm	220 x 310 x 50 mm	7.2kg	NO	4K,5K,7K	50,000H
BL-FE-XL-SL400_/_/40	400W	52000lm	295 x 402 x 60 mm	10.3kg	NO	4K,5K,7K	50,000H
BL-FE-XL-SL600_/_/40	600W	78000lm	330 x 430 x 60 mm	11.8kg	NO	4K,5K,7K	50,000H
BL-FE-XL-SL900_/_/40	900W	117000lm	360 x 470 x 60 mm	17.5kg	NO	4K,5K,7K	50,000H
BL-FE-XL-SL1200_	1200W	156000lm	800 x 500 x 100 mm	20.5kg	NO	4K,5K,7K	50,000H





*Bulli Aged Care\_Post Top*




## LED Box Light

- Versatile Design
- Die Cast Aluminum Body & Acrylic Lens
- Powder Coated Black Finish,
- Type II,III,IV,V options
- High Efficiency CREE LED
- IP65 rating
- CRI 70
- 130lm/W
- 60mm Adjust Spigot (Standard)
- 1-10v
- Round Pole or Square Pole Mount
- Adjustable Trunion Wall or Pipe Mount Option



## Applications

- Car Parks
- Outdoor Sporting Courts, Basketball & Tennis
- Hard Stand Areas
- Security
- General Area Lighting

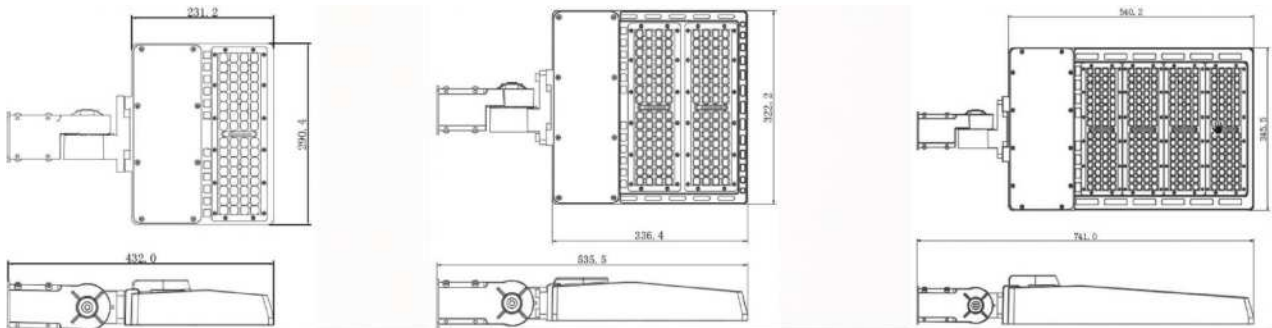

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime	Optics
BL-FL-XL-XHD80/_/_/40_	75W	9750lm	290 x 230 x 70 mm	3.2kg	NO	4000K	50,000H	II, III, IV, V
BL-FL-XL-XHD100/_/_/40_	100W	13000lm	290 x 230 x 70 mm	3.2kg	NO	4000K	50,000H	II, III, IV, V
BL-FL-XL-XHD150/_/_/40_	150W	19500lm	336 x 233 x 70 mm	5.6kg	NO	4000K	50,000H	II, III, IV, V
BL-FL-XL-XHD200/_/_/40_	200W	26000lm	336 x 233 x 70 mm	5.6kg	NO	4000K	50,000H	II, III, IV, V









## FL LED Sports Floodlight

- Die Cast Aluminum Body & Tempered glass
- Powder Coated Black Finish, Flicker Free
- 600w - 1200w options
- Asymmetrical & Symmetrical, 12°- 60°
- 360° mounting bracket to adjust angles
- IP66/IK08 rating
- CRI 70-90
- L70-178,000hrs, L80-111,000hrs, L90-53,000hrs
- 140-160lm/W
- DMX, Dali or 1-10v options



## Applications

- Large Sports Stadiums
- Basketball & Tennis Courts
- Sporting Fields & Area Lighting
- Carparks
- Airports

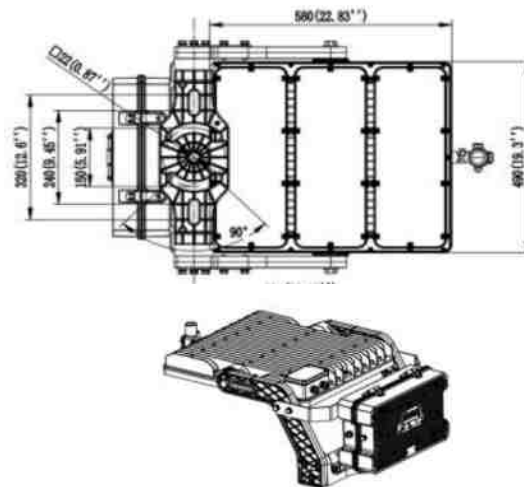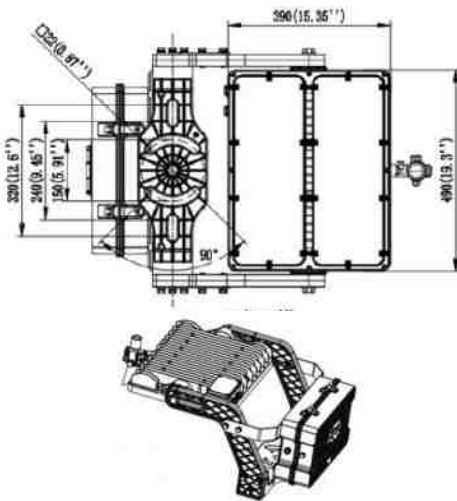

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour	Optics
BL-SPFL6/600W/5K	600W	89,400lm	610 x 510 x 145 mm	26±0.3kg	NO	5000K	II
BL-SPFL12/1200W/5K	1200W	178,800lm	700 x 610 x 145 mm	29.8±0.3kg	NO	5000K	II







**BOUNCE**  
LIGHTING



***Solar Lighting***\_\_\_\_\_




## Solar LED Streetlight


- Slim Design
- Mono-crystalline photovoltaic Solar panel
- Die Cast Aluminum Body, Silver Finish & Polycarbonate Optical Lens
- LiFePO4 Battery
- Built in Motion Sensor and timer dimming function
- Smart Control
- IP65 & IK08 rating
- CRI 70
- L70 100,000hrs
- 4000K (3000k & 5000K optional)
- 200lm/w
- TYPE II light distribution
- Mounting options: Side Entry, Post Top, Pole Clamp & wall mount

## Applications

- Car Parks
- Courtyard
- Parking
- Security
- General Area Lighting

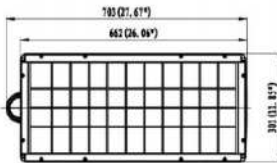

Post Top Mount

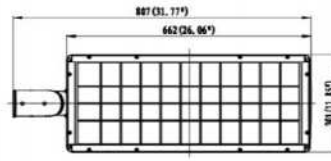

Side Entry Mount

Item Code	Wattage	Lumen	Dimensions	Weight	Dimming	Colour Temp	Lifetime	Optics
BL-AGST43-010/40K	10W	2000lm	662 x 301 x 94 mm	5.0±0.3kg	NO	4000K	50,000H	II
BL-AGST43-020/40K	20W	4000lm	662 x 301 x 94 mm	5.7±0.3kg	NO	4000K	50,000H	II
BL-AGST43-030/40K	30W	6000lm	662 x 301 x 94 mm	6.3±0.3kg	NO	4000K	50,000H	II





## ***Contact us***

***Unit 3/14 Lancaster Street  
Ingleburn NSW 2564***

***Sales - 02 9829 2596***

***Matthew - 0488 336 344***

***Mon - Fri 08:00 am - 05:00 pm***

***Sat - Sun Closed***

***Web: [www.bouncelighting.com](http://www.bouncelighting.com)***